

QUALSERV[®]

SOLUTIONS / INTERNATIONAL



REFRIGERATION PRODUCT CATALOG



Engineered to chill.
Built to perform.

As a division of Middleby Corporation—a world leader in developing advanced innovation and solutions for commercial and industrial foodservice—QualServ is proud to expand our commercial refrigeration offering. Our suite of commercial refrigeration and appliances is built around food safety and product preservation, designed to support the needs of modern foodservice operations across hospitality, foodservice, entertainment venues, and more. From chef bases and prep tables to reach-in refrigeration, our robust kitchen solutions are engineered to help operators prep and serve with confidence—trusted since 1978.



qualservintl.com

sales.refrigeration@qualservintl.com

800.643.2980

CONTENTS

REFRIGERATION SOLUTIONS

6 Mega-Tops

13 Sandwich Prep Tables

20 Pass-Thru Refrigerators

25 Pizza Prep Tables

27 Reach-In Refrigerators & Freezers

58 Refrigerator & Freezer Bases

48 Roll-In Refrigerators & Freezers

53 Roll-Through Refrigerators

56 Undercounter Front-Venting Refrigerators & Freezers





REFRIGERATION SOLUTIONS



Mega-Tops

REFRIGERATION SOLUTIONS

A staple in foodservice kitchens, mega-tops offer advantages that make them true assets to culinary operations. These spacious and versatile refrigerated prep tables are specifically designed to accommodate a wide range of ingredients, condiments, and toppings, providing chefs and kitchen staff with convenient access to essential ingredients during meal preparation. With multiple compartments and lower refrigeration compartments, mega-tops allow for the organization and storage of ingredients, optimizing workflow and reducing prep time. Constructed from high-quality materials and featuring robust refrigeration systems, QualServ mega-tops maintain consistent temperature control, preserving the freshness and quality of ingredients for extended periods. Designed for easy cleaning and maintenance, with removable compartments and stainless steel surfaces that are resistant to stains and corrosion. With their combination of practical functionality, durability, and reliability, QualServ mega-tops prove to be perfect additions to any foodservice kitchen, improving food preparation processes.

Refrigerated Mega Tops

- Mega Tops offer an all-in-one design solution for salad, sandwich and meal prep.
- Our trusted Mega Tops give staff the confidence of keeping ingredients fresh.
- Casters (2 locking) included for easy mobility.
- Features a full-length white polythene cutting board that provides a dedicated space to prep ingredients.



UCMT127-SS11A



UCMT132-SS11A



UCMT148-SS61A




UCMT160-SS61A

Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCMT127-SS11A	27" Refrigerated Mega Top (1 Door)	115v / 60hz / 1 / 3.4	242 lb
UCMT132-SS11A	32" Refrigerated Mega Top (1 Door)	115v / 60hz / 1 / 3.4	264 lb
UCMT148-SS61A	48" Refrigerated Mega Top (2 Doors)	115v / 60hz / 1 / 3.4	375 lb
UCMT160-SS61A	60" Refrigerated Mega Top (2 Doors)	115v / 60hz / 1 / 3.4	462 lb


Specifications

UCMT127-SS11A: 27 1/2" W X 35 1/2" D X 42 1/2" H
UCMT132-SS11A: 32 1/2" W X 35 1/2" D X 42 1/2" H
UCMT148-SS61A: 48" W X 35 1/2" D X 42 1/2" H
UCMT160-SS61A: 60 1/2" W X 35 1/2" D X 42 1/2" H
UCMT127-SS11A: 1 PVC coated wire shelf (included with purchase) holds (1) 12" x 20" pan and (3) 1/6 pans, pan rail holds (12) 1/6 pans
UCMT132-SS11A: 1 PVC coated wire shelf (included with purchase) holds (2) 12" x 20" pans, pan rail holds (12) 1/6 pans
UCMT148-SS61A: 2 PVC coated wire shelves (included with purchase) each hold (1) 12" x 20" pan and (3) 1/9 pans, pan rail holds (18) 1/6 pans
UCMT160-SS61A: 2 PVC coated wire shelves (included with purchase) each hold (1) 12" x 20" pan, (3) 1/6 pans and (3) 1/9 pans, pan rail holds (24) 1/6 pans
AISI 304 stainless steel interior and exterior
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant
Factory pre-wired for dedicated outlet, 10 ft cord and plug included NEMA 5-15P
High efficiency compressor, side mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Pan rail accommodates either 4" or 6" tall pans
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: 28°F to 46°F


Front (UCMT127-SS11A)

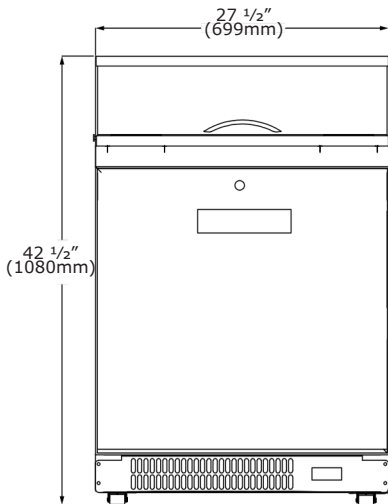


Front (UCMT132-SS11A)

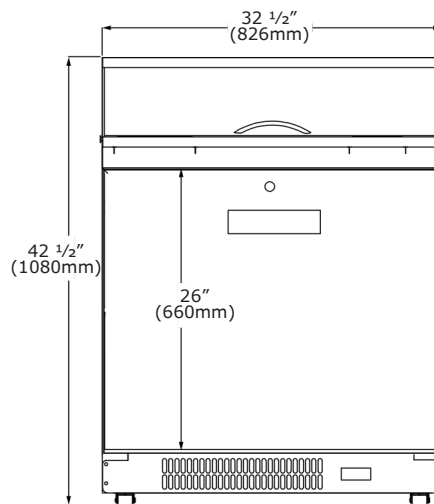


Side (All Models)

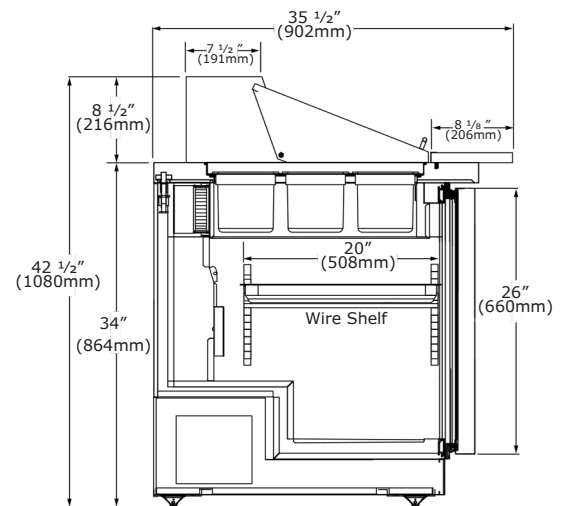


Top Rail (UCMT127-SS11A)

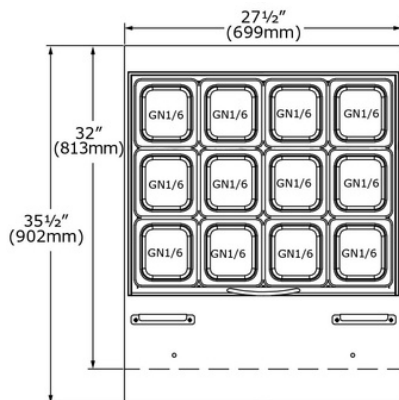


Top Rail (UCMT132-SS11A)

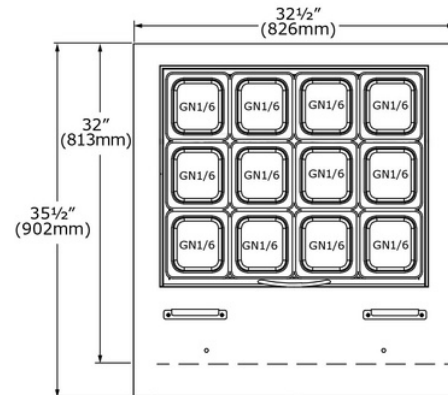


Door Interior (UCMT127-SS11A)

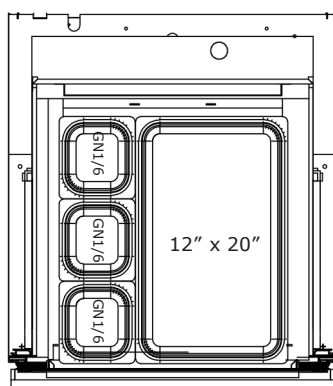


Door Interior (UCMT132-SS11A)

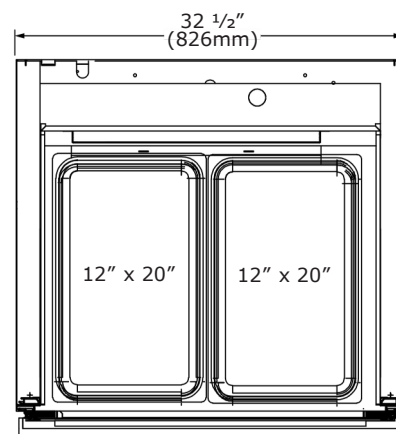


Front (UCMT148-SS61A)

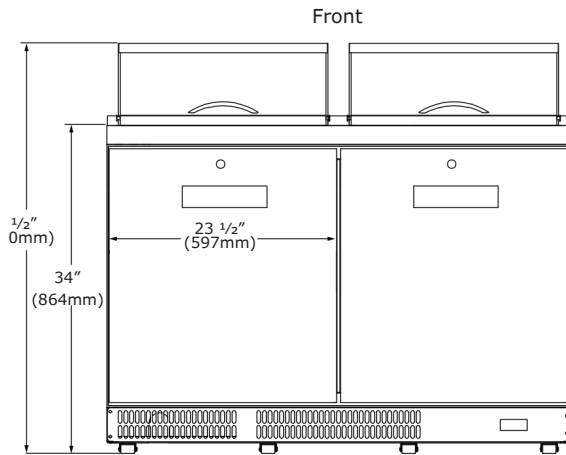


Front (UCMT160-SS61A)

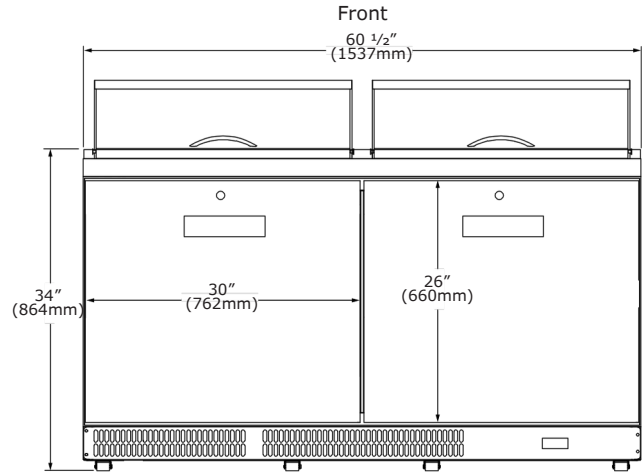


Top Rail (UCMT148-SS61A)

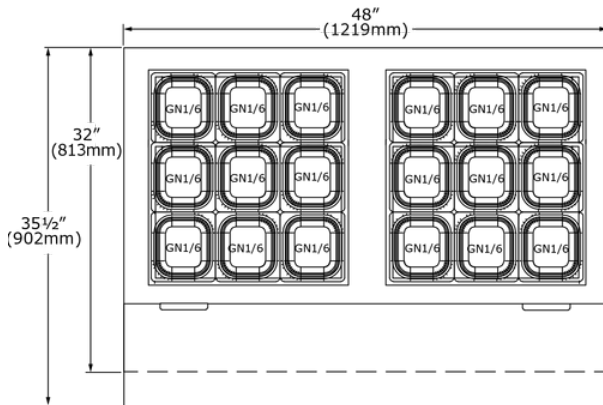


Top Rail (UCMT160-SS61A)

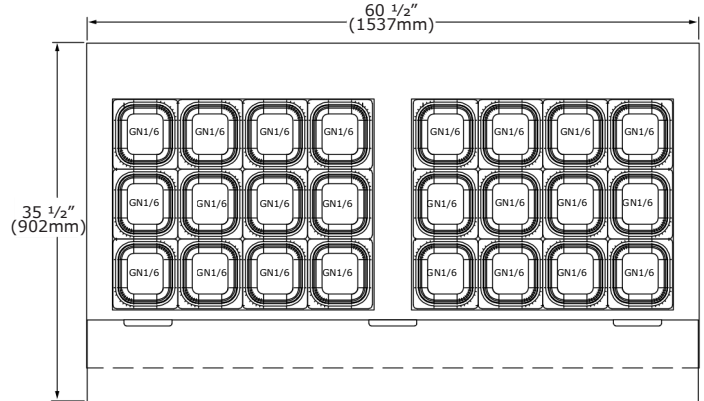

Door Interior (UCMT148-SS61A)

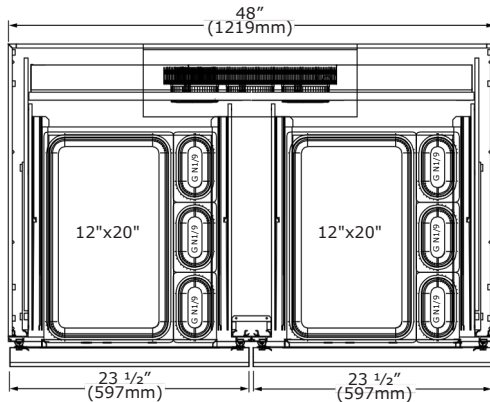

Door Interior (UCMT160-SS61A)

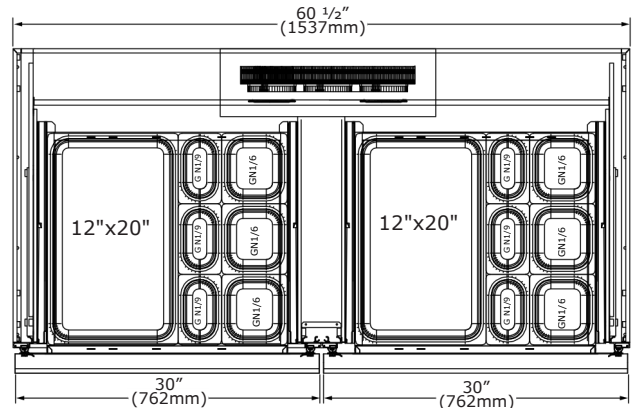

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details



Refrigerated Mega Tops with Drawers

- Mega Tops offer an all-in-one design solution for salad, sandwich and meal prep.
- Our trusted Mega Tops give staff the confidence of keeping ingredients fresh.
- Casters (2 locking) included for easy mobility.
- Features a full-length white polythene cutting board that provides a dedicated space to prep ingredients.



UCMT127-SS91A



UCMT132-SS91A



UCMT148-SS91A



UCMT160-SS91A

Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCMT127-SS91A	27" Refrigerated Mega Top (2 Drawers)	115v / 60hz / 1 / 3.4	264 lb
UCMT132-SS91A	32" Refrigerated Mega Top (2 Drawers)	115v / 60hz / 1 / 3.4	286 lb
UCMT148-SS91A	48" Refrigerated Mega Top (4 Drawers)	115v / 60hz / 1 / 3.4	408 lb
UCMT160-SS91A	60" Refrigerated Mega Top (4 Drawers)	115v / 60hz / 1 / 3.4	507 lb

Specifications

UCMT127-SS91A: 27 1/2" W X 35 1/2" D X 42 1/2" H

UCMT132-SS91A: 32 1/2" W X 35 1/2" D X 42 1/2" H

UCMT148-SS91A: 48" W X 35 1/2" D X 42 1/2" H

UCMT160-SS91A: 60 1/2" W X 35 1/2" D X 42 1/2" H

UCMT127-SS91A: Each drawer holds (1) 12" x 20" pan and (3) 1/6 pans, pan rail holds (12) 1/6 pans

UCMT132-SS91A: Each drawer holds (2) 12"x 20" pans, pan rail holds (12) 1/6 pans

UCMT148-SS91A: Each drawer holds (1) 12" x 20" pan and (3) 1/9 pans, pan rail holds (18) 1/6 pans

UCMT160-SS91A: Each drawer holds (1) 12" x 20" pan, (3) 1/6 pans and (3) 1/9 pans, pan rail holds (24) 1/6 pans AISI 304

stainless steel interior and exterior Auto defrost

Bottom drawer accommodates 4" tall pans

CFC-free high-density polyurethane insulated cabinet

Electronic digital temperature control with alarms

Environmentally friendly R290 refrigerant

Factory pre-wired for dedicated outlet, 10 ft cord and plug included NEMA 5-15P

High efficiency compressor, side mount

High efficiency evaporator coil & condenser

NSF/ANSI Standard 7 compliant


Pan rail accommodates either 4" or 6" tall pans

Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design


Temperature range: 28°F to 46°F

Top drawer accommodates 6" tall pans


Front (UCMT127-SS91A)

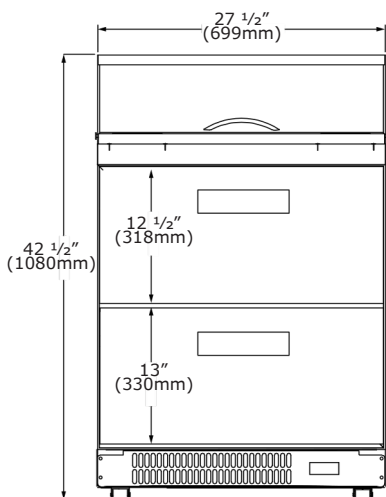


Front (UCMT132-SS91A)

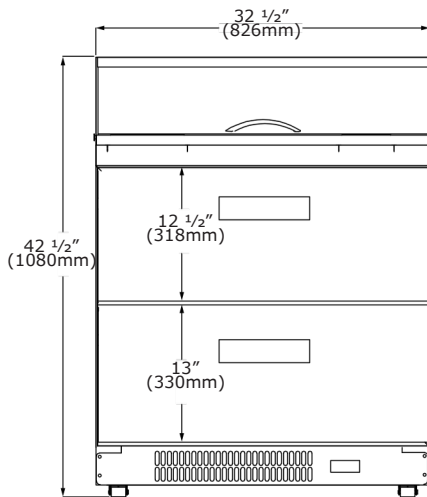


Side (All Models)

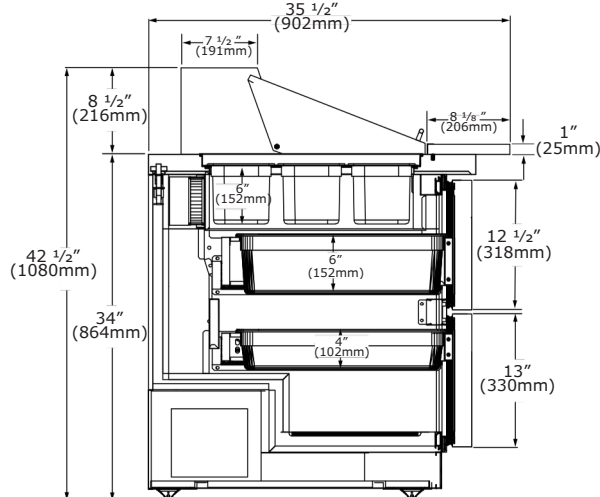


Top Rail (UCMT127-SS91A)

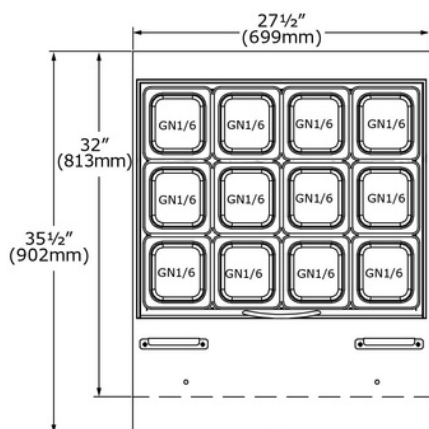


Top Rail (UCMT132-SS91A)

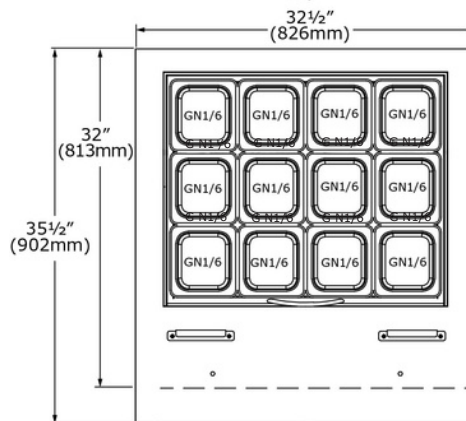


Drawer Interior (UCMT127-SS91A)

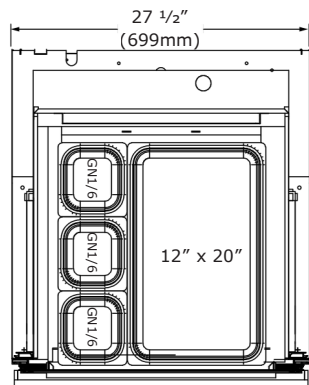


Drawer Interior (UCMT132-SS91A)

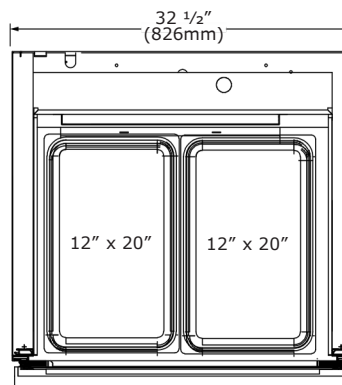


Front (UCMT148-SS91A)

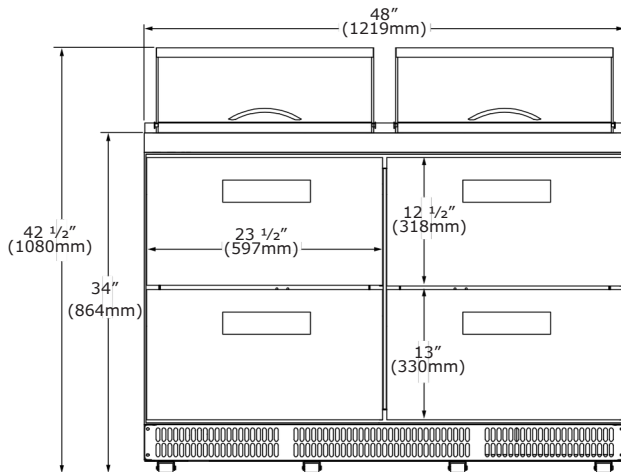


Front (UCMT160-SS91A)

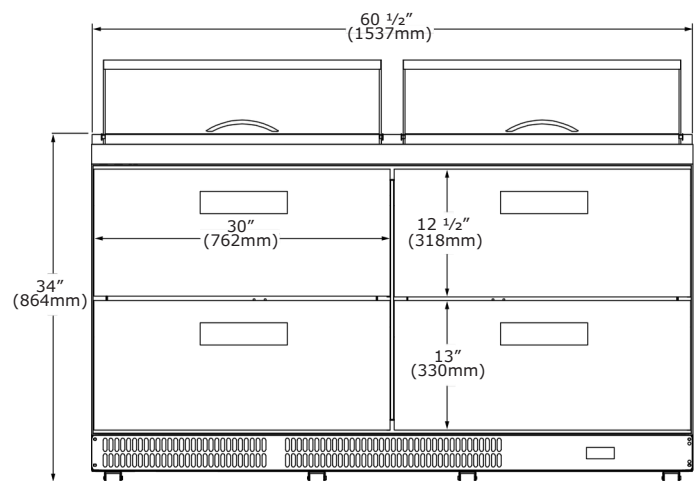


Top Rail (UCMT148-SS91A)

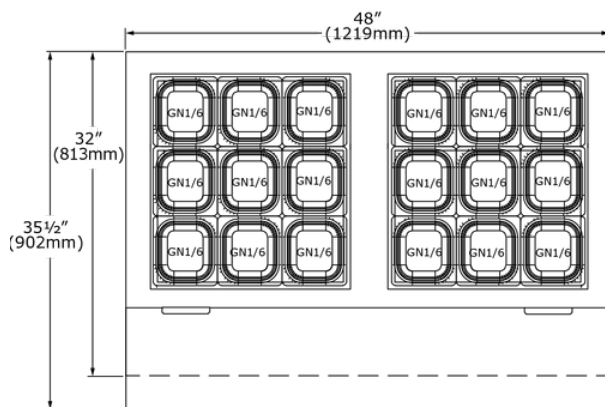


Top Rail (UCMT160-SS91A)

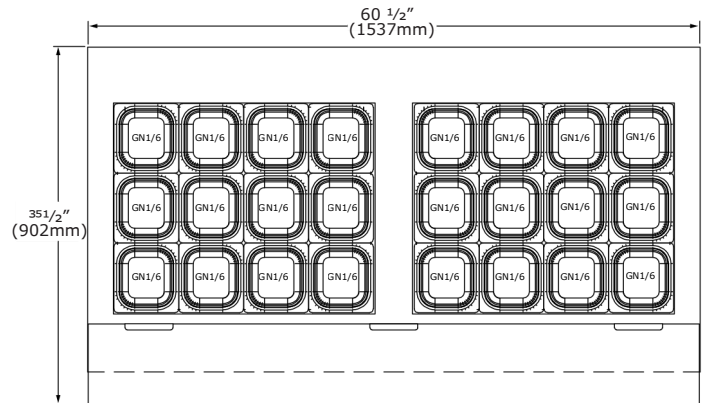

Drawer Interior (UCMT148-SS91A)

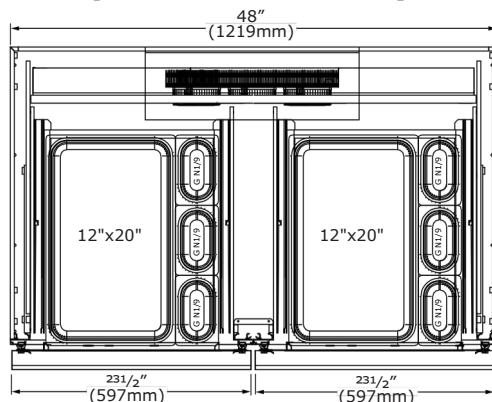

Drawer Interior (UCMT160-SS91A)

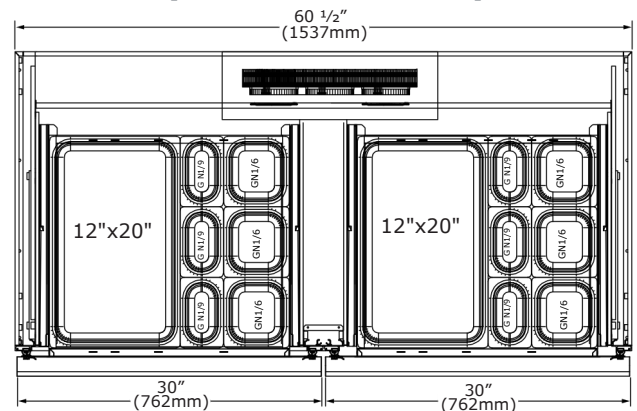

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details





Sandwich Prep Tables

REFRIGERATION SOLUTIONS

Refrigerated sandwich prep tables are a vital component in foodservice kitchens, offering significant benefits that make them invaluable to culinary operations. These roomy and adaptable refrigerated prep tables are crafted to hold a diverse array of ingredients, condiments, and toppings, giving chefs and kitchen staff easy access to essential items during meal preparation. Featuring multiple compartments and lower refrigeration sections, mega-tops facilitate the organization and storage of ingredients, enhancing workflow efficiency and minimizing preparation time.

With models featuring sealed condiment rails and catch trays, and others with glass top condiment rails and granite worktops, staff can easily create delicious food without leaving a single workstation, improve kitchen traffic flow, and maintain organization.

Sandwich Prep Tables

- Prep tables offer an all-in-one design solution for salad, sandwich and meal prep.
- Our trusted Sandwich Prep Tables give staff the confidence of keeping ingredients fresh.
- Casters (2 locking) included for easy mobility.
- Features a full-length white polythene cutting board that provides a dedicated space to prep ingredients.



UCSP127-SS11A



UCSP132-SS11A



UCSP148-SS61A




UCSP160-SS61A

Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCSP127-SS11A	27" Sandwich Prep Table (1 Door)	115v / 60hz / 1 / 3.4	242 lb
UCSP132-SS11A	32" Sandwich Prep Table (1 Door)	115v / 60hz / 1 / 3.4	264 lb
UCSP148-SS61A	48" Sandwich Prep Table (2 Doors)	115v / 60hz / 1 / 3.4	375 lb
UCSP160-SS61A	60" Sandwich Prep Table (2 Doors)	115v / 60hz / 1 / 3.4	462 lb


Specifications

UCSP127-SS11A: 27 1/2" W X 35 1/2" D X 42 1/2" H
UCSP132-SS11A: 32 1/2" W X 35 1/2" D X 42 1/2" H
UCSP148-SS61A: 48" W X 35 1/2" D X 42 1/2" H
UCSP160-SS61A: 60 1/2" W X 35 1/2" D X 42 1/2" H
UCSP127-SS11A: 1 PVC coated wire shelf (included with purchase) holds (1) 12" x 20" pan and (3) 1/6 pans, pan rail holds (8) 1/6 pans
UCSP132-SS11A: 1 PVC coated wire shelf (included with purchase) holds (2) 12" x 20" pans, pan rail holds (8) 1/6 pans
UCSP148-SS61A: 2 PVC coated wire shelves (included with purchase) each hold (1) 12" x 20" pan and (3) 1/9 pans, pan rail holds (12) 1/6 pans
UCSP160-SS61A: 2 PVC coated wire shelves (included with purchase) each hold (1) 12" x 20" pan, (3) 1/6 pans and (3) 1/9 pans, pan rail holds (16) 1/6 pans
AISI 304 stainless steel interior and exterior
Autodefroast
CFC-free high-density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant
Factory pre-wired for dedicated outlet, 10 ft cord and plug included NEMA 5-15P
High efficiency compressor, side mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Pan rail accommodates either 4" or 6" tall pans
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: 28°F to 46°F


Front (UCSP127-SS11A)

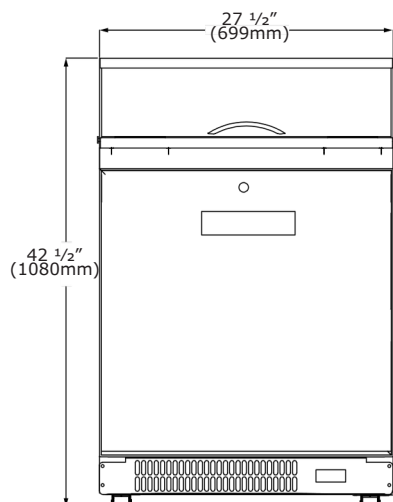


Front (UCSP132-SS11A)

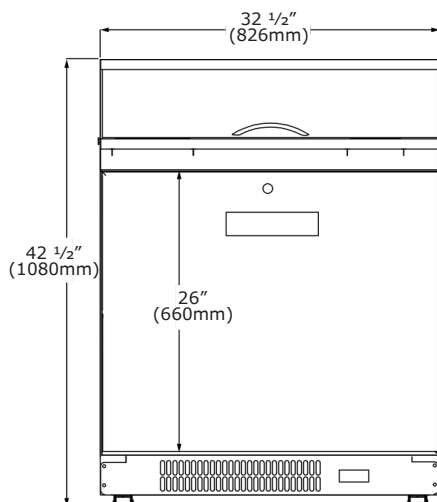


Side (All Models)

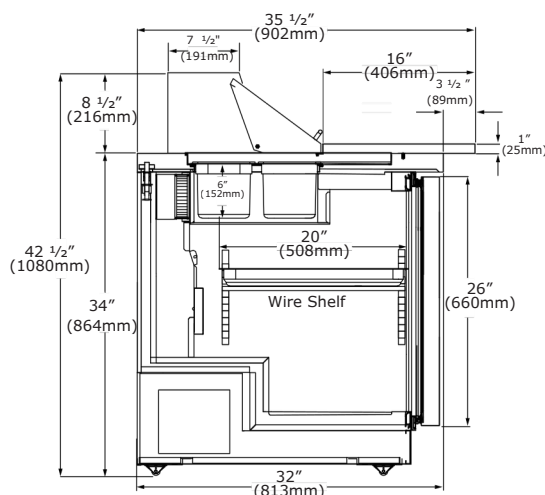


Top Rail (UCSP127-SS11A)

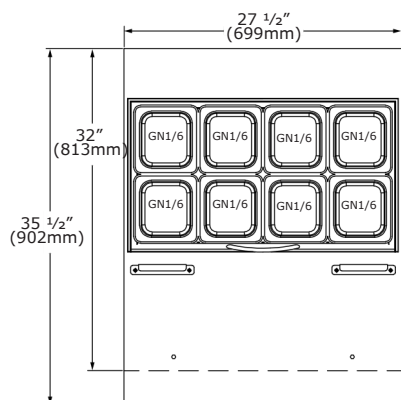


Top Rail (UCSP132-SS11A)

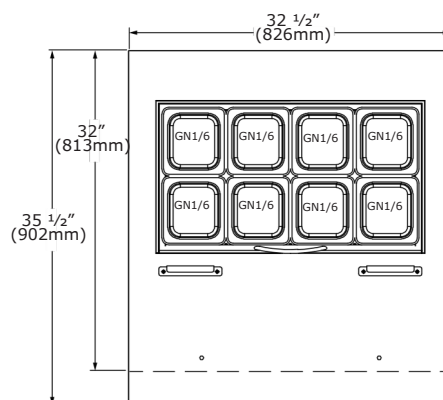


Door Interior (UC SP127-SS11A)

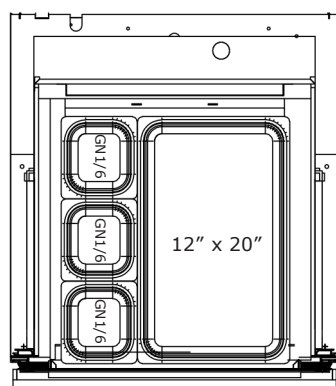


Door Interior (UC SP132-SS11A)

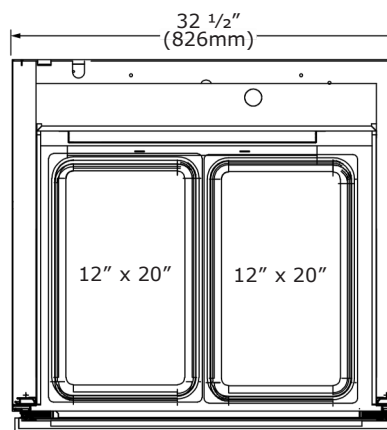


Front (UCSP148-SS61A)

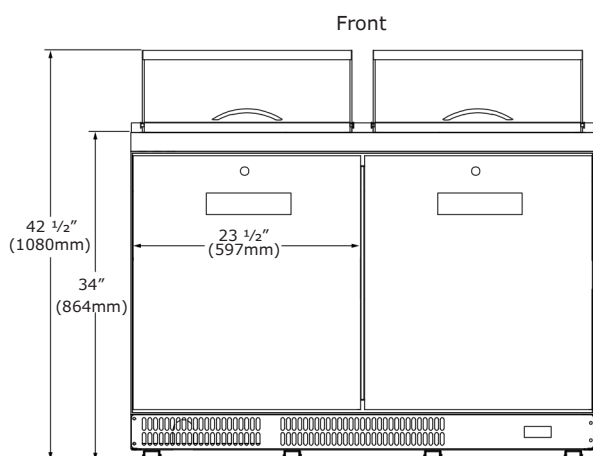


Front (UCSP160-SS61A)

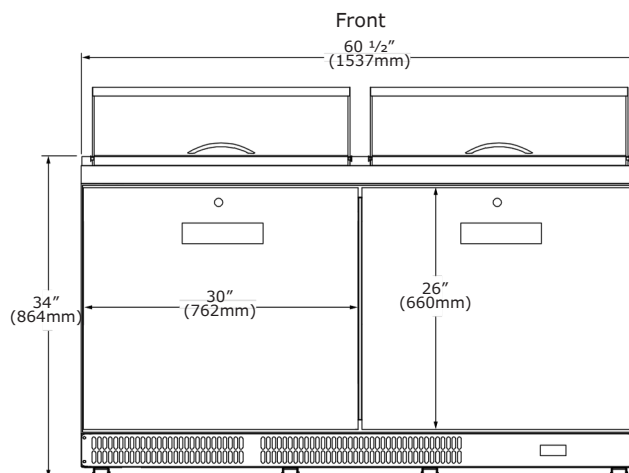


Top Rail (UCSP148-SS61A)

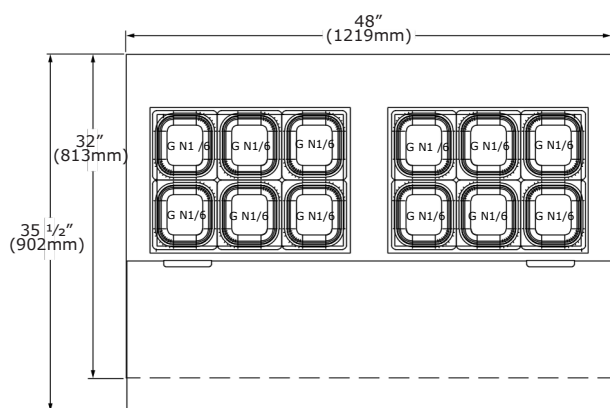


Top Rail (UCSP160-SS61A)

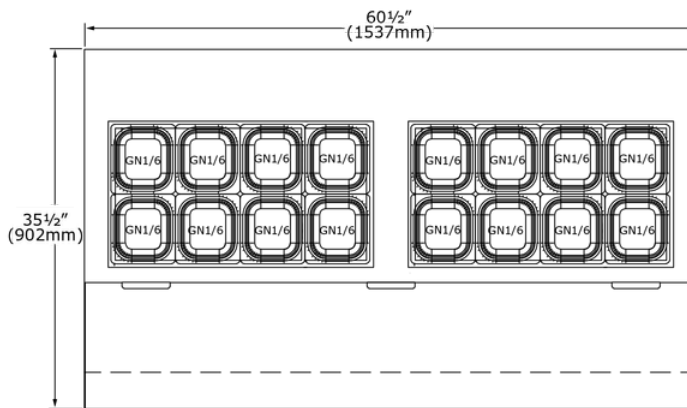

Door Interior (UC SP148-SS61A)

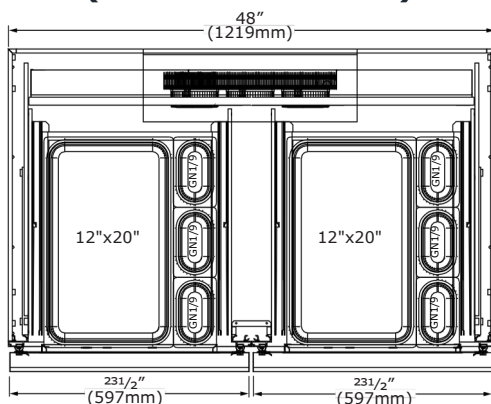

Door Interior (UC SP160-SS61A)

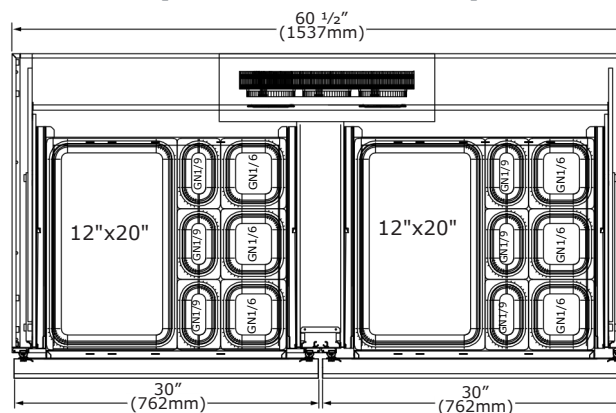

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details



Sandwich Prep Tables with Drawers

- Prep tables offer an all-in-one design solution for salad, sandwich and meal prep.
- Our trusted Sandwich Prep Tables give staff the confidence of keeping ingredients fresh.
- Casters (2 locking) included for easy mobility.
- Features a full-length white polythene cutting board that provides a dedicated space to prep ingredients.



UCSP127-SS91A



UCSP132-SS91A



UCSP148-SS91A



UCSP160-SS91A

Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCSP127-SS91A	27" Sandwich Prep Table (2 Drawers)	115v / 60hz / 1 / 3.4	264 lb
UCSP132-SS91A	32" Sandwich Prep Table (2 Drawers)	115v / 60hz / 1 / 3.4	286 lb
UCSP148-SS91A	48" Sandwich Prep Table (4 Drawers)	115v / 60hz / 1 / 3.4	408 lb
UCSP160-SS91A	60" Sandwich Prep Table (4 Drawers)	115v / 60hz / 1 / 3.4	507 lb

Specifications

UCSP127-SS91A: 27 1/2" W X 35 1/2" D X 42 1/2" H

UCSP132-SS91A: 32 1/2" W X 35 1/2" D X 42 1/2" H

UCSP148-SS91A: 48" W X 35 1/2" D X 42 1/2" H

UCSP160-SS91A: 60 1/2" W X 35 1/2" D X 42 1/2" H

UCSP127-SS91A: Each drawer holds (1) 12" x 20" pan and (3) 1/6 pans, pan rail holds (8) 1/6 pans

UCSP132-SS91A: Each drawer holds (2) 12"x 20" pans, pan rail holds (8) 1/6 pans

UCSP148-SS91A: Each drawer holds (1) 12" x 20" pan and (3) 1/9 pans, pan rail holds (12) 1/6 pans

UCSP160-SS91A: Each drawer holds (1) 12" x 20" pan, (3) 1/6 pans and (3) 1/9 pans, pan rail holds (16) 1/6 pans

AISI 304 stainless steel interior and exterior

Autodefroster

Bottom drawer accommodates 4" tall pans

CFC-free high-density polyurethane insulated cabinet

Electronic digital temperature control with alarms

Environmentally friendly R290 refrigerant

Factory pre-wired for dedicated outlet, 10 ft cord and plug included

NEMA 5-15P High efficiency compressor, side mount

High efficiency evaporator coil & condenser

NSF/ANSI Standard 7 compliant


Pan rail accommodates either 4" or 6" tall pans

Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design


Temperature range: 28°F to 46°F

Top drawer accommodates 6" tall pans


Front (UCSP127-SS91A)

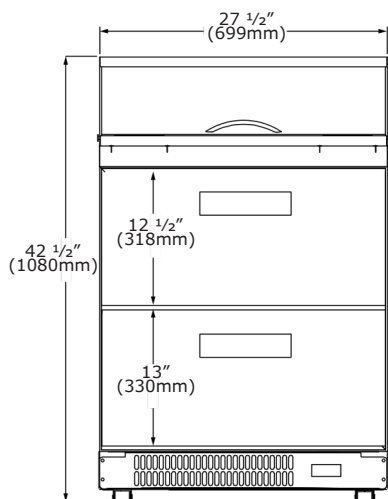


Front (UCSP132-SS91A)

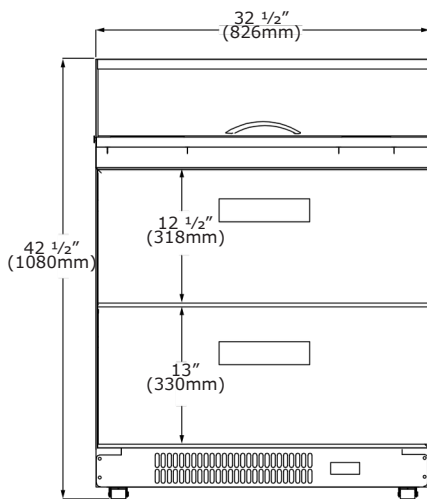


Side (All Models)

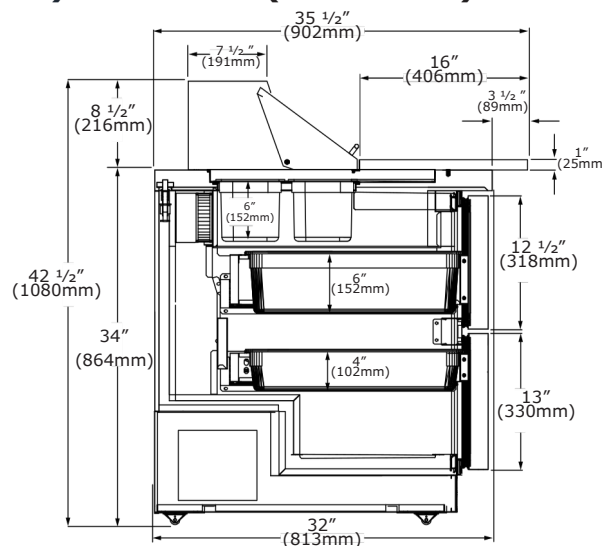


Top Rail (UCSP127-SS91A)

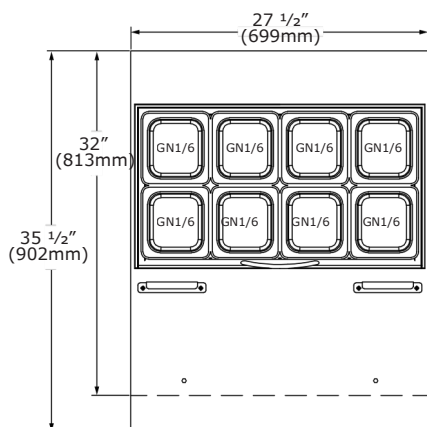


Top Rail (UCSP132-SS91A)

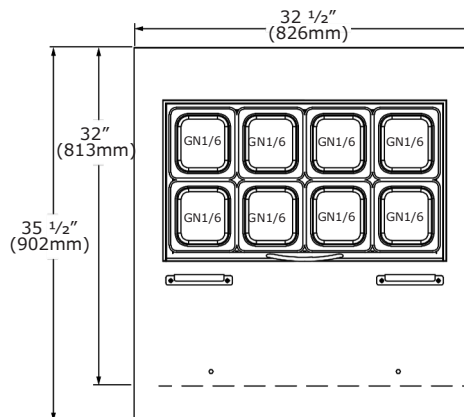


**Drawer Interior
(UC SP127-SS91A)**

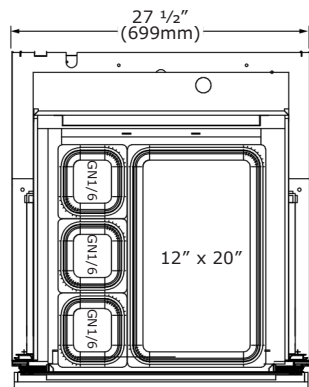


**Drawer Interior
(UCSP132-SS91A)**

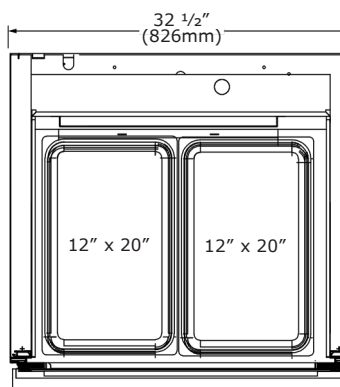


Front (UCSP148-SS91A)

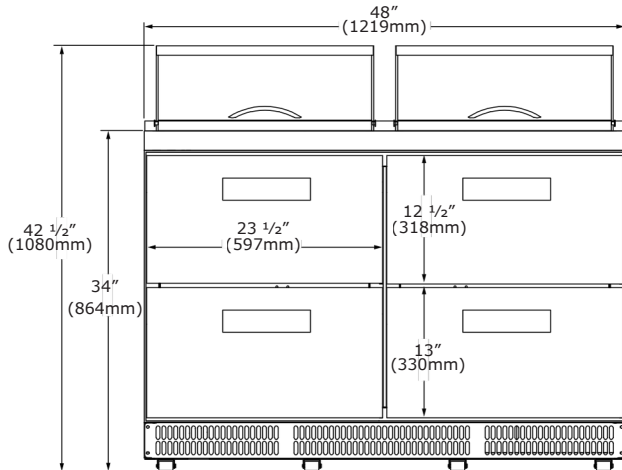


Front (UCSP160-SS91A)

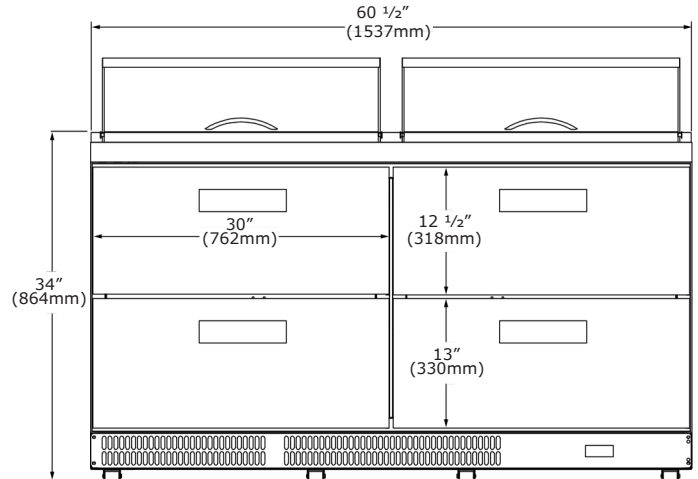


Top Rail (UCSP148-SS91A)

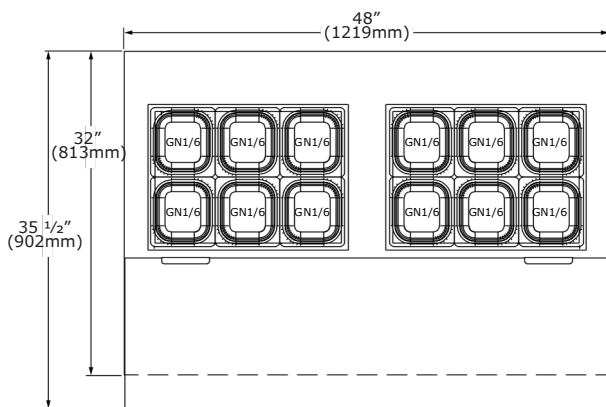


Top Rail (UCSP160-SS91A)

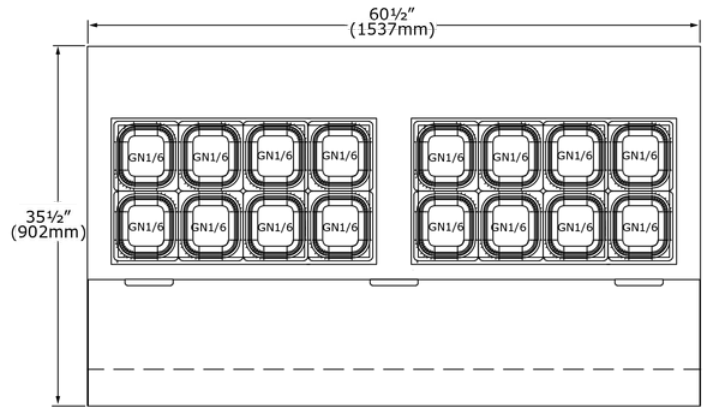

Drawer Interior (UCSP148-SS91A)

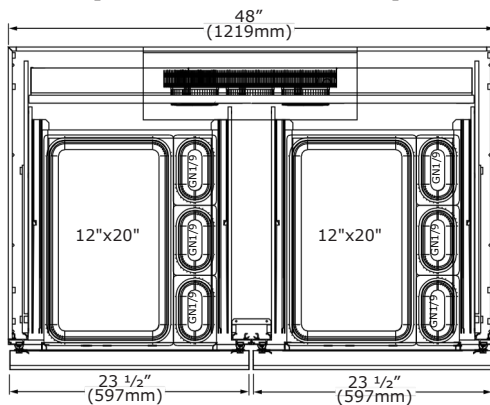

Drawer Interior (UCSP160-SS91A)

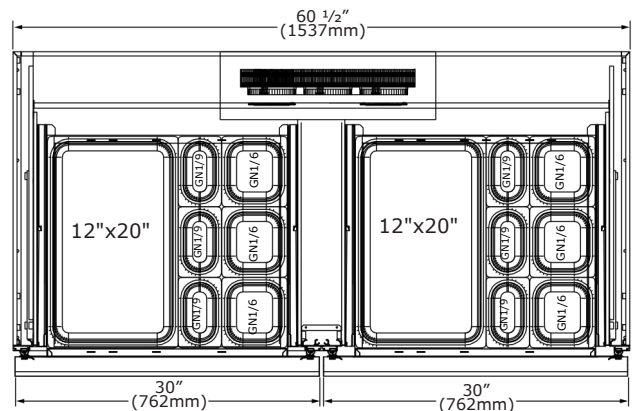

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details





Pass-Thru Refrigerators

REFRIGERATION SOLUTIONS

Pass-Thru refrigerators are a key component of any cafeteria kitchen, optimizing and streamlining operations. These refrigerators feature multiple access points, allowing kitchen staff to load supplies from one side and retrieve them from the other, facilitating a smooth flow and minimizing disruptions to food preparation processes. This multi-access design contributes to improved organization and inventory management, as staff can easily monitor to maintain freshness and quality. Designed for easy cleaning and maintenance, with accessible interior compartments that simplify upkeep tasks. With their combination of practical functionality, durability, and reliability in a wide variety of options, QualServ's collection of Pass-Thru refrigerators prove to be assets in any kitchen, contributing to smoother operations and ensuring the efficient delivery of high-quality meals.

25 cu ft Pass-Thru Refrigerators, Reach-In

- Key component to any high-volume cafeteria or commissary kitchen.
- Refill products from the back and serve from the front, creating efficiency in the kitchen or serving line.
- Available in solid door, glass door, and half-door combination options.



UCRP125-SS31A



UCRP125-GS31A



UCRP225-SS31A



UCRP225-GS31A



UCRP125-GG31A


Model	Description	Voltage/Hz/Phase/Amps.	Shipping Weight
UCRP125-SS31A	25 cu ft Pass-Thru Refrigerator, 1 Front Door Solid, 1 Back Door Solid	115v / 60hz / 1 / 3.4	355 lb
UCRP125-GS31A	25 cu ft Pass-Thru Refrigerator, 1 Front Door Glass, 1 Back Door Solid	115v / 60hz / 1 / 3.4	355 lb
UCRP225-SS31A	25 cu ft Pass-Thru Refrigerator, 2 Half Front Door Solid, 2 Half Back Door Solid	115v / 60hz / 1 / 3.4	355 lb
UCRP225-GS31A	25 cu ft Pass-Thru Refrigerator, 2 Half Front Door Glass, 2 Half Back Door Solid	115v / 60hz / 1 / 3.4	355 lb
UCRP125-GG31A	25 cu ft Pass-Thru Refrigerator, 1 Front Door Glass, 1 Back Door Glass	115v / 60hz / 1 / 3.4	355 lb

Specifications


Dimensions: 83 1/4" H x 28 3/8" W x 32" D (doors closed), 84 1/16" D (doors open)
AISI 304 stainless steel interior and exterior with locks
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Environmentally friendly R290 refrigerant: 3.5 oz (0.100kg)
Electronic digital temperature control with alarms
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
LED interior lighting
NSF/ANSI Standard 7 compliant
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: 28°F to 46°F
Volume of 25 cu ft 1 section, includes 6 pairs of L style tray guides (trays not included)

Accessories	Description	Shipping Weight
ULAPS4181145	(1) Stainless steel L-shaped shelf guide	1 lb


Front

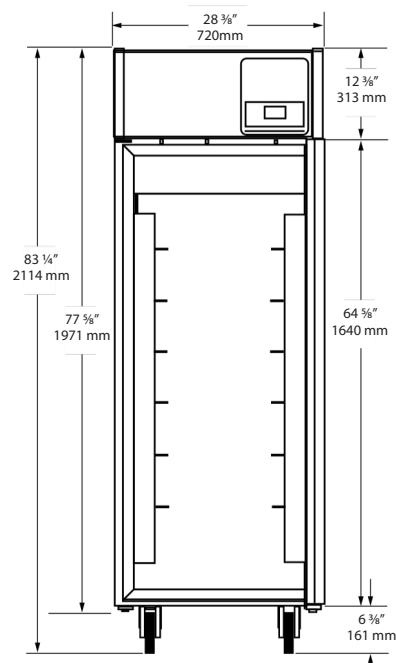

Side

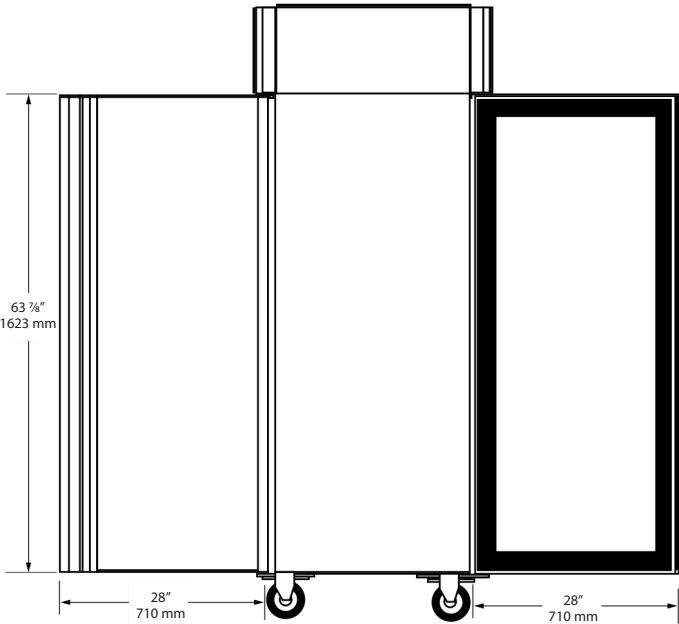

Top

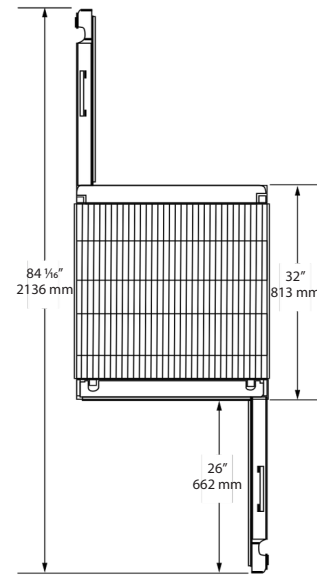

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

49 cu ft Pass-Thru Refrigerators, Reach-In

- Key component to any high-volume cafeteria or commissary kitchen.
- Refill products from the back and serve from the front, creating efficiency in the kitchen or serving line.
- Available in solid door, glass door, and half-door combination options.



UCRP149-SS71A



UCRP149-GS71A



UCRP249-SS71A



UCRP249-GS71A




UCRP149-GG71A

Model	Description	Voltage/Hz/Phase/Amps.	Shipping Weight
UCRP149-SS71A	49 cu ft Pass-Thru Refrigerator, 2 Front Door Solid, 2 Back Door Solid	115v / 60hz / 1 / 6.4	440 lb
UCRP149-GS71A	49 cu ft Pass-Thru Refrigerator, 2 Front Door Glass, 2 Back Door Solid	115v / 60hz / 1 / 6.4	440 lb
UCRP249-SS71A	49 cu ft Pass-Thru Refrigerator, 4 Half Front Door Solid, 4 Half Back Door Solid	115v / 60hz / 1 / 6.4	440 lb
UCRP249-GS71A	49 cu ft Pass-Thru Refrigerator, 4 Half Front Door Glass, 4 Half Back Door Solid	115v / 60hz / 1 / 6.4	440 lb
UCRP149-GG71A	49 cu ft Pass-Thru Refrigerator, 2 Front Door Glass, 2 Back Door Glass	115v / 60hz / 1 / 6.4	440 lb


Specifications

Dimensions: 83 1/4" H x 56 11/16" W x 32" D (doors closed), 84 1/16" D (doors open)
AISI 304 stainless steel interior and exterior with locks
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Environmentally friendly R290 refrigerant: 3.5 oz (0.100kg)
Electronic digital temperature control with alarms
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
LED interior lighting
NSF/ANSI Standard 7 compliant
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: 28°F to 46°F
Volume of 49 cu ft 2 sections, includes 12 pairs of L style tray guides (trays not included)


Front

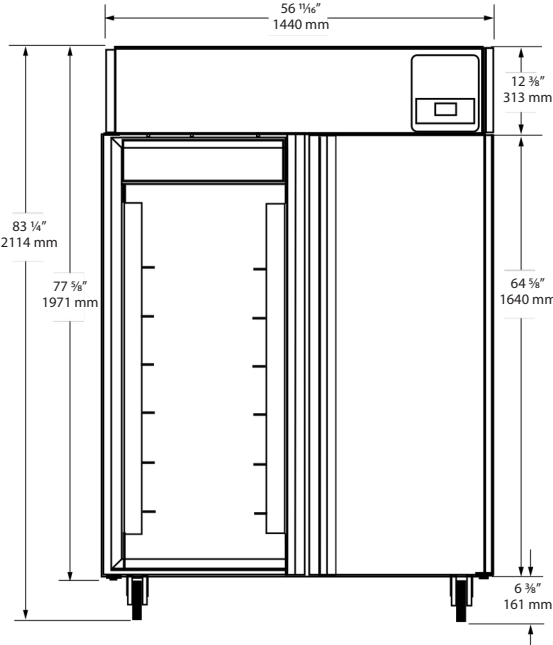

Side

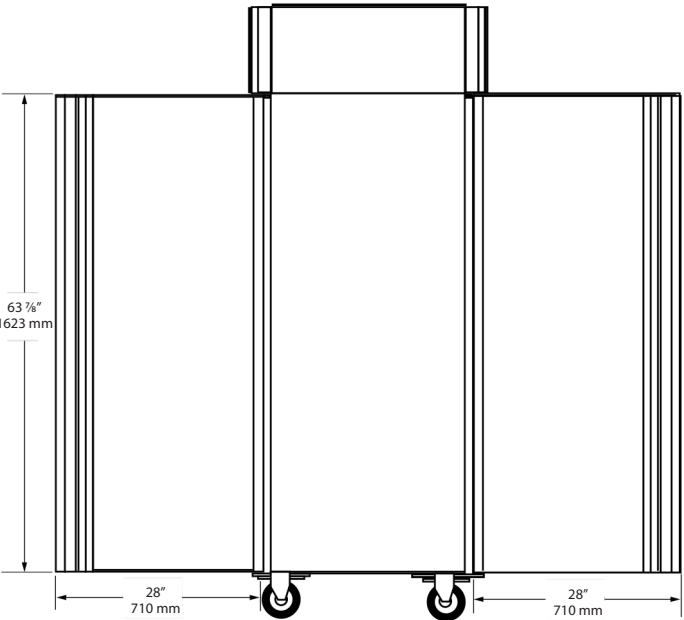

Top

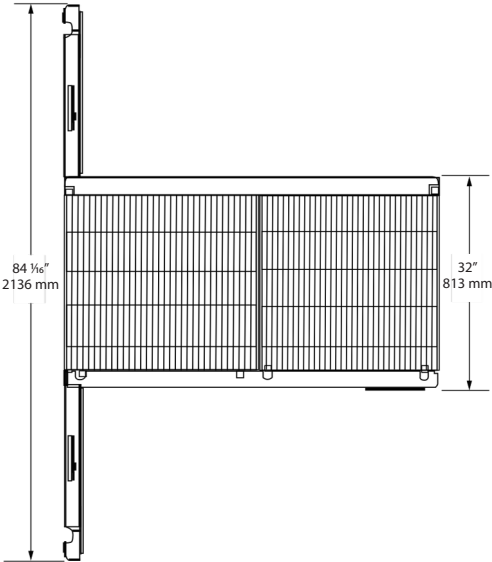

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



Pizza Prep Tables

REFRIGERATION SOLUTIONS

Our pizza prep table refrigerators offer a tailored solution for any kitchen, combining convenience, functionality, and efficiency in food preparation processes. These specialized refrigerators are designed with dedicated compartments to accommodate ingredients and food preparation supplies, providing chefs and kitchen staff with easy access to essential items during meal assembly.


6 Drawer Ambient Dough Cabinet

- Prep table storage companion
- Perfect for pizza dough or to store additional utensils, cutting boards or trays
- Features 6 storage drawers
- 4 casters (2 locking) included for easy mobility




UCCATP


Top



Front

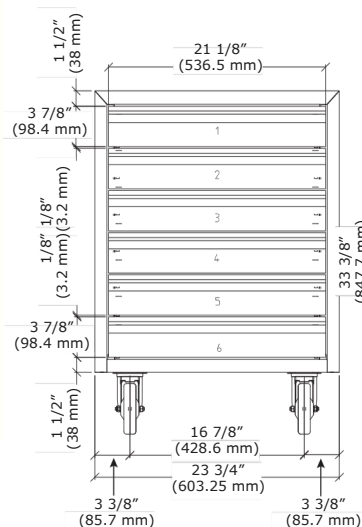

Side

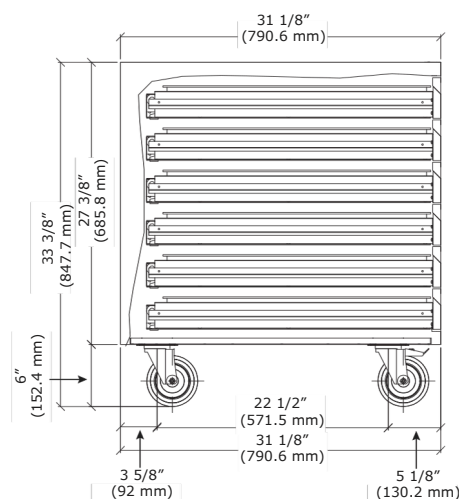

Model	Description	Shipping Weight
UCCATP	6 Drawer Ambient Dough Cabinet	132 lb

Specifications

- UCCATP dimensions: 33 7/8" H X 23 3/4" W X 31 1/8" D
- AISI 304 stainless steel interior and exterior
- Holds up to 6 dough boxes (25 5/8" W X 18" D X 3 1/4" H)
- NSF/ANSI Standard 7 compliant

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details



Reach-In Refrigerators & Freezers

REFRIGERATION SOLUTIONS

QualServ commercial reach-in refrigerators and freezers are the foundation to any kitchen or foodservice operation. These appliances are crafted to provide ample storage space while maintaining optimal temperature levels, ensuring that perishable ingredients and food items remain fresh and safe. QualServ reach-in refrigerators and freezers accommodate a diverse range of food products, allowing chefs and kitchen staff to organize and store ingredients according to their specific needs. Whether used in restaurants, catering services, or institutional kitchens, our products optimize workflow and contribute to seamless operations.

Available in a wide variety of sizes with glass and solid door options, QualServ offers trusted reach-in freezers and refrigerators that give staff confidence in keeping ingredients and prepared foods fresh. Featuring easy-to-use controls, stainless steel interiors and exteriors, and high-performance compressors, our thoughtfully designed refrigeration will improve the flow and function of your space.



25 cu ft Refrigerator, Reach-In

- Improve the flow and function of your space by having refrigerated items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- 4 casters included (2 locking) for easy mobility



UCRE427-SS01A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE427-SS01A	25 cu ft Refrigerator, Reach-In, Field Reversible Hinge	115v / 60hz / 3.8	287 lb

Specifications


UCRE427-SS01A dimensions: 80 23/32" H x 27 9/16" W x 31 1/2" D
AISI 441 stainless steel interior and exterior with lock
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Environmentally friendly R290 refrigerant: 3.2 oz (0.090kg)
Electronic digital temperature control with alarms
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: 28°F to 46°F
Volume of 25 cu ft
1 section, includes 3 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA89020410	Stainless steel adjustable leg kit includes 4 legs, 4 5/8" H to 7 1/8" H, M6 bolts	11.02 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


Front (Open)

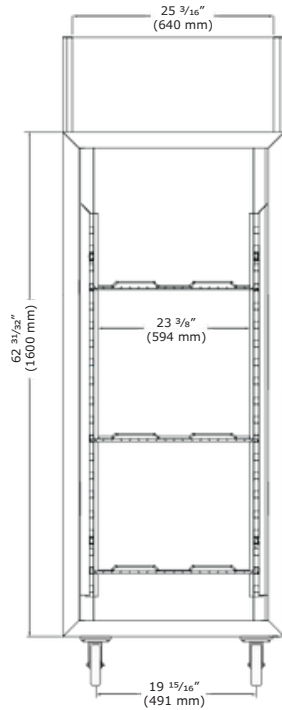


Front (Closed)

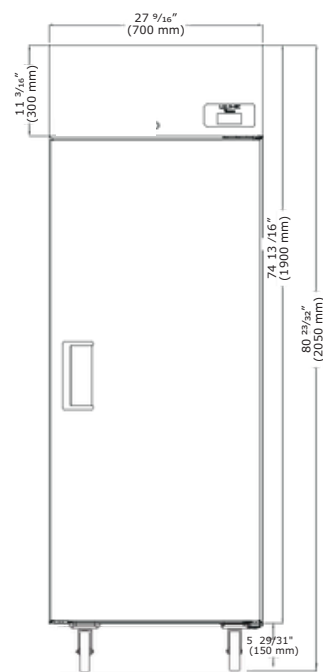

Top

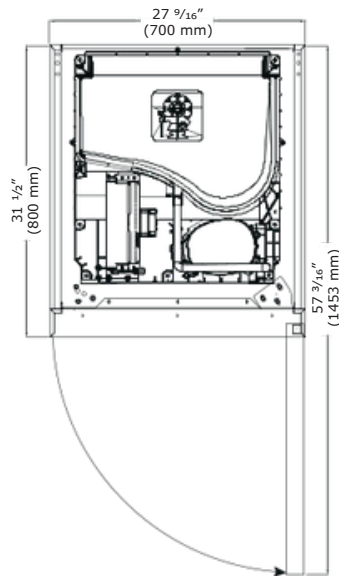

Side

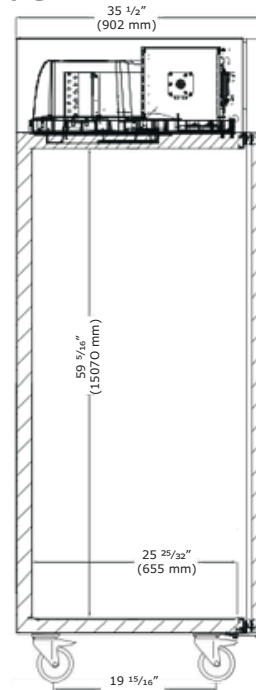

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



25 cu ft Refrigerators, Reach-In

- Improve the flow and function of your space by having refrigerated items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- Glass & solid door options available
- 4 casters (2 locking) included to provide easy mobility
- LED lighting on glass door models



UCRE527-SS31A



UCRE527-SG41A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE527-SS31A	25 cu ft Refrigerator Solid Door, Reach-In, Field Reversible Hinge	115v / 60hz / 3.2	287 lb
UCRE527-SG41A	25 cu ft Refrigerator Glass Door, Reach-In, Right Hand Hinge	115v / 60hz / 3.2	327 lb

Specifications


UCRE527-SS31A dimensions: 82 9/32" H x 26 57/64" W x 31 1/2" D
UCRE527-SG41A dimensions: 82 9/32" H x 26 57/64" W x 31 1/2" D
AISI 304 stainless steel interior and exterior with lock
Autodefrost
CFC-free high density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant - 3.2 oz (0.090kg)
Epoxy coated, sealed evaporator eliminates potential of corrosion
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
Includes 3 epoxy coated wire shelves
NSF/ANSI Standard 7 compliant
Temperature range: 28°F to 46°F
Volume of 25 cu ft

Accessories	Description	Shipping Weight
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


Front (Open)

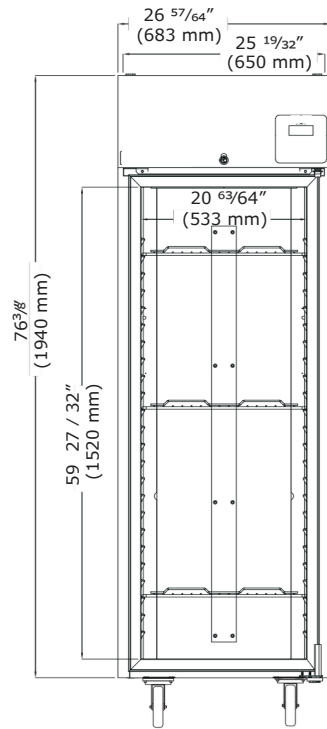


Side

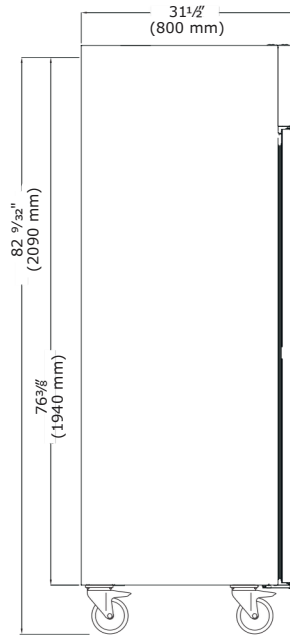


Front (Closed - Glass Door)

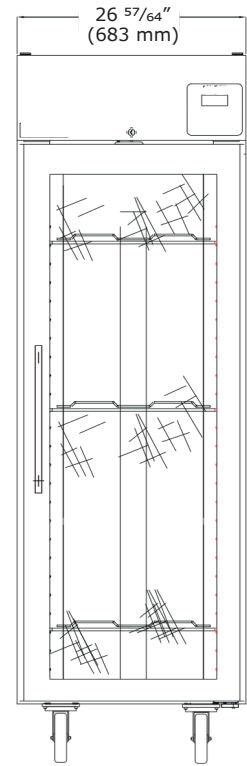

Top

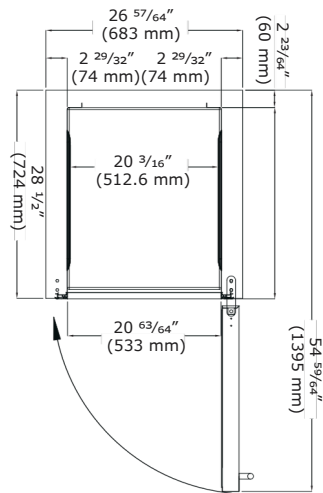

Side

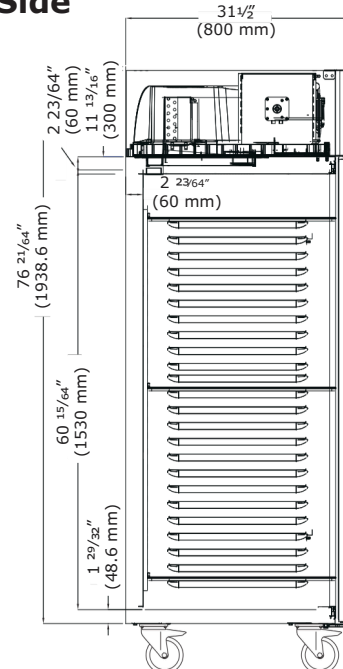

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



49 cu ft Refrigerator, Reach-In

- Improve the flow and function of your space by having frozen items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- 4 casters included (2 locking) for easy mobility



UCRE455-SS71A


Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCRE455-SS71A	Freezer, Reach-In	115v / 60hz / 1 / 9.6	418 lb

Specifications


UCRE455-SS71A dimensions: 80 23/32" H x 55 1/8" W x 31 1/2" D
AISI 441 stainless steel interior and exterior with locks
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant: 4.2 oz (0.120kg)
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: 28°F to 46°F
Volume of 49 cu ft
2 sections, includes 6 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA89030400	Stainless steel adjustable leg kit includes 5 legs, 4-5/8" H to 7-1/8" H, M8 bolts	11.02 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


Front (Open)

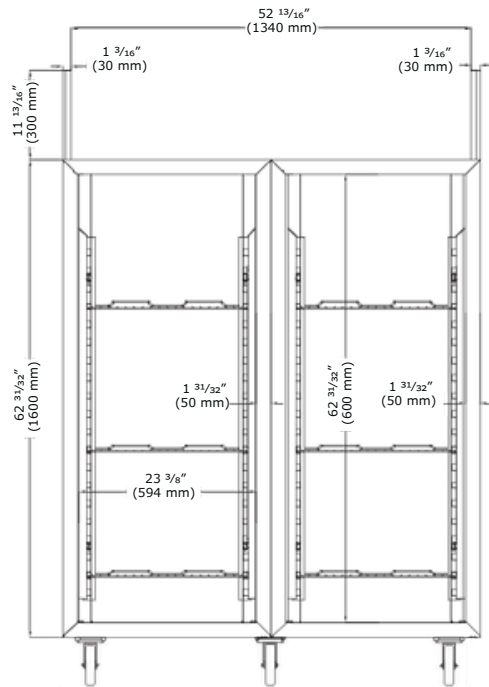


Front (Closed)

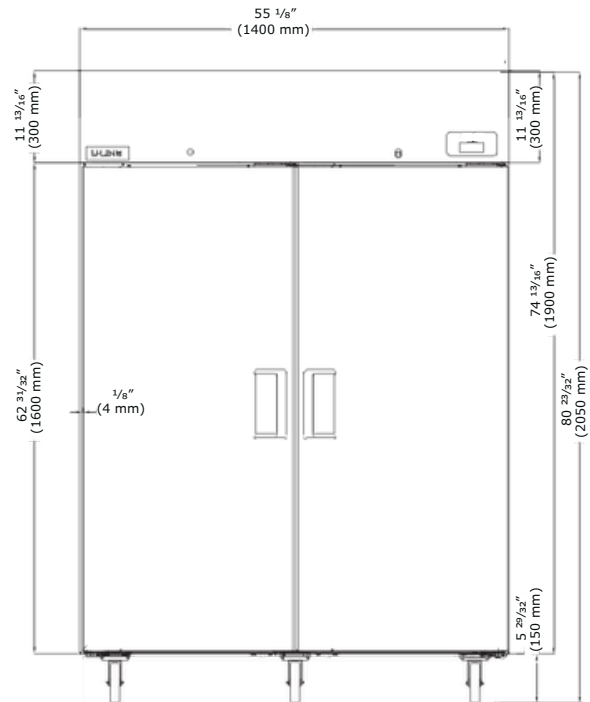

Top

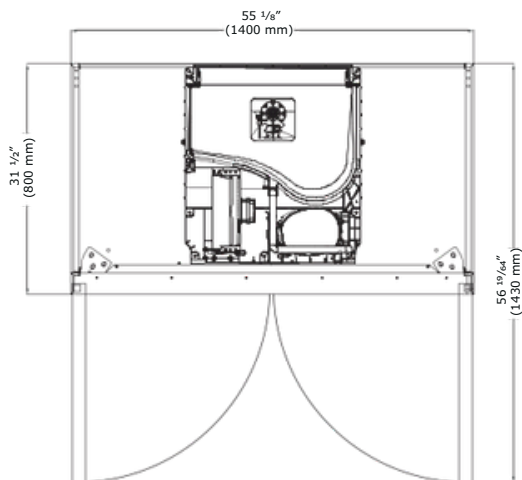

Side

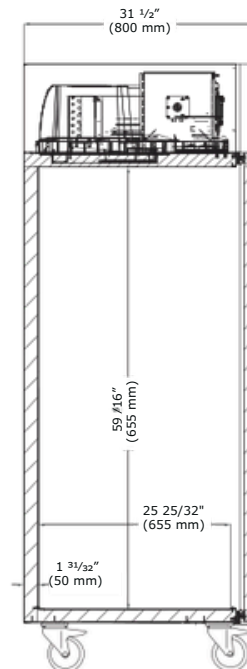

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



49 cu ft Refrigerators, Reach-In

- Improve the flow and function of your space by having refrigerated items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- Glass & solid door options available
- 6 casters included (2 locking) for easy mobility
- LED lighting on glass door models



UCRE553-SS71A



UCRE553-SG71A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE553-SS71A	49 cu ft Refrigerator, Reach-In, Solid Door	115v / 60hz / 5.4	419 lb
UCRE553-SG71A	49 cu ft Refrigerator, Reach-In, Glass Door	115v / 60hz / 5.4	518 lb

Specifications


UCRE553-SS71A dimensions: 82 9/32" H x 52 9/16" W x 31 1/2" D
UCRE553-SG71A dimensions: 82 9/32" H x 52 9/16" W x 31 1/2" D
AISI 304 stainless steel interior and exterior with locks
Autodefrost
CFC-free high density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant - 3.5 oz (0.100 kg)
Epoxy coated, sealed evaporator eliminates potential corrosion
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency evaporator coil & condenser
High efficiency top-mounted compressor
NSF/ANSI Standard 7 compliant
Temperature range: 28°F to 46°F
Volume of 49 cu ft
2 sections, includes 6 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080534	(1) Stainless steel embossed shelf guide for UCRE553 & UCFZ553 reach-ins, 22"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


**Front
(Closed - Solid Door)**

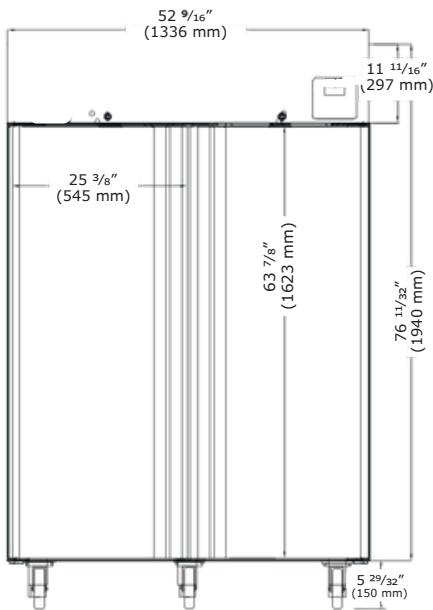


**Front
(Closed - Glass Door)**

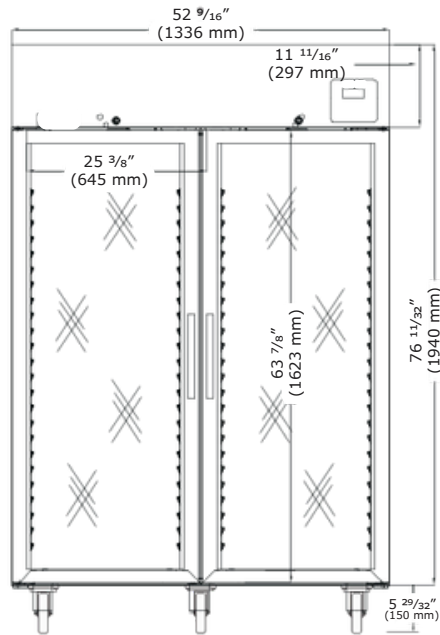


Side

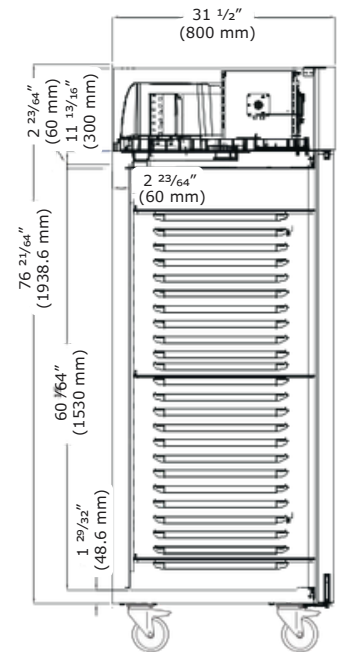


Top

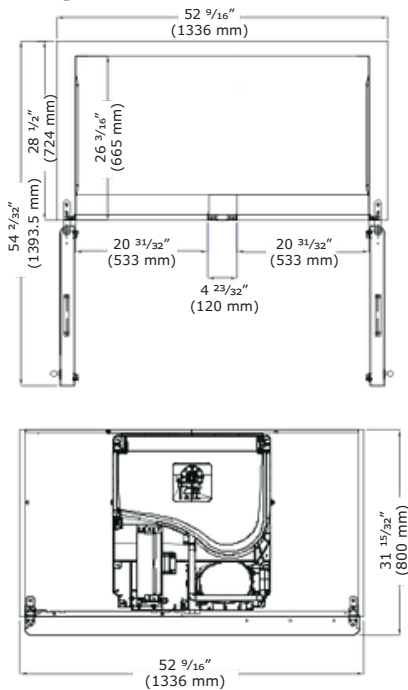

Back

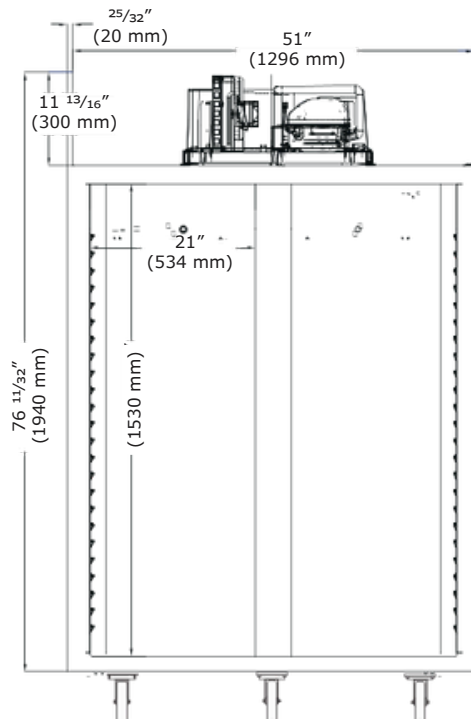

Side

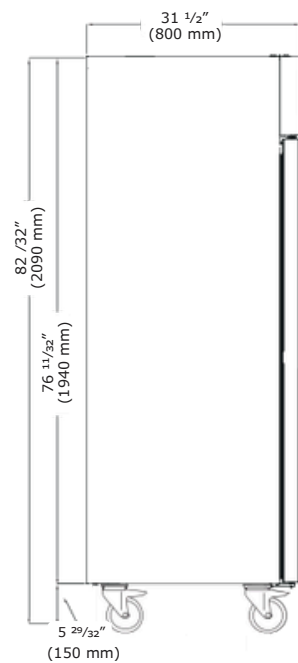

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



74 cu ft Refrigerators, Reach-In

- Improve the flow and function of your space by having refrigerated items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- Glass & solid door options available
- 8 casters included (2 locking) for easy mobility
- LED lighting on glass door models



UCRE585-SS71A



UCRE585-SG71A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE585-SS71A	Refrigerator, Reach-In, Solid Door	115v / 60hz / 7	650 lb.
UCRE585-SG71A	Refrigerator, Reach-In, Glass Door	115v / 60hz / 7	750 lb

Specifications


UCRE585-SS71A dimensions: 83 15/32" H x 85 3/64" W x 31 15/32" D
UCRE585-SG71A dimensions: 83 15/32" H x 85 3/64" W x 31 15/32" D
AISI 304 stainless steel interior and exterior with locks
Autodefroster
CFC-free high density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant: 2 x 3.2 oz (2 x 0.090 kg)
Epoxy coated, sealed evaporator eliminates potential corrosion
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency evaporator coil & condenser
High efficiency top-mounted compressor
NSF/ANSI Standard 7 compliant
Temperature range: 28°F to 46°F
Volume of 74 cu ft
3 sections, includes 9 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


Front (Closed - Solid Door)

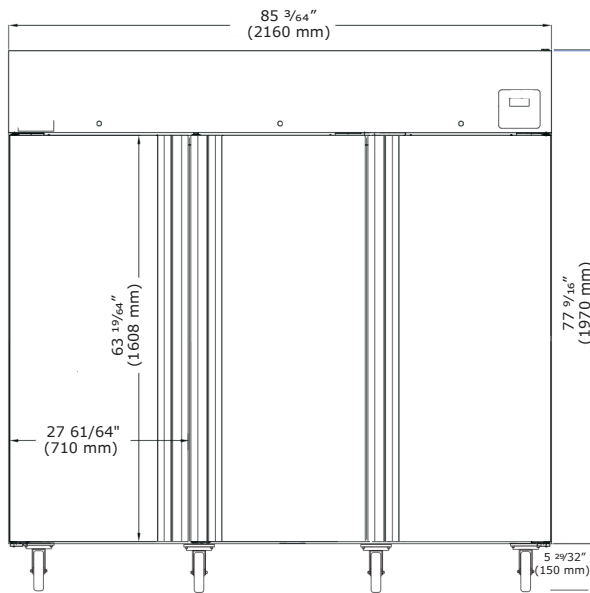


Front (Open)

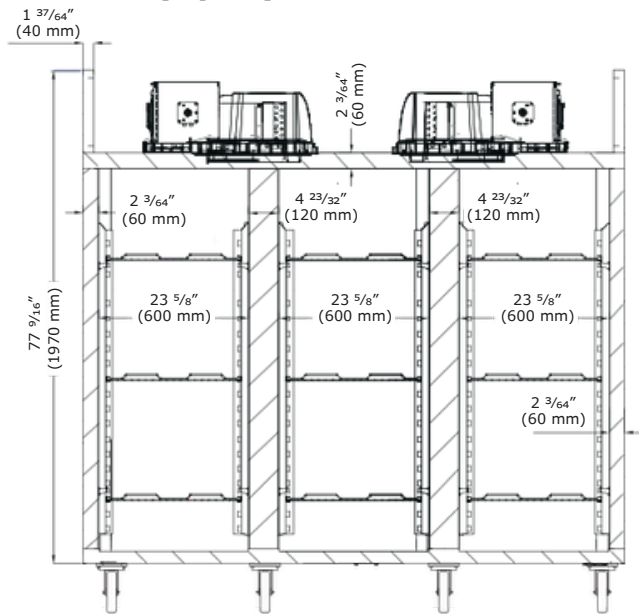


Front (Closed - Glass Door)

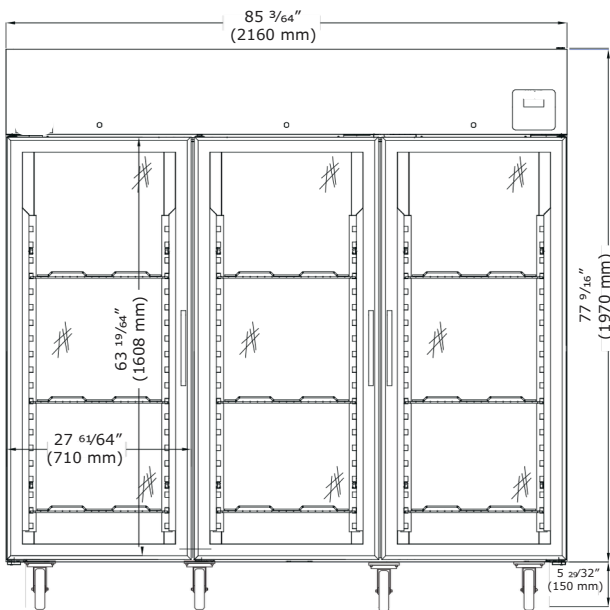

Side

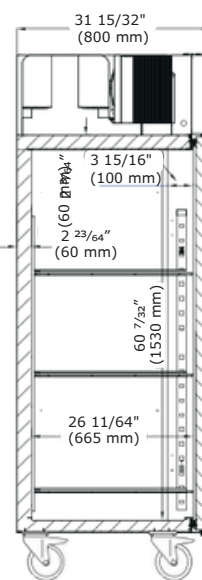

Top

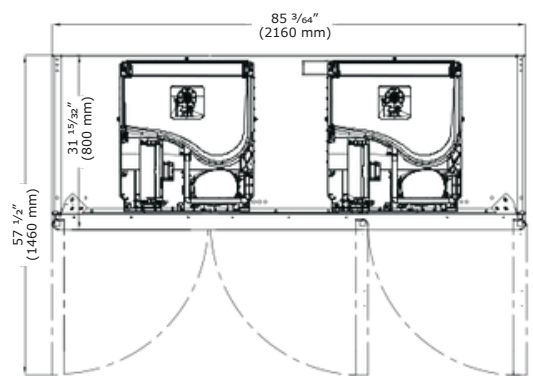

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



25 cu ft Freezer, Reach-In

- Improve the flow and function of your space by having frozen items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- 4 casters included (2 locking) for easy mobility



UCFZ427-SS01A


Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCFZ427-SS01A	25 cu ft Freezer, Reach-In, Field Reversible Hinge	115v / 60hz / 1 / 6.2	287 lb

Specifications


UCFZ427-SS01A dimensions: 80 23/32" H x 27 9/16" W x 31 1/2" D
AISI 441 stainless steel interior and exterior with lock
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant: 3.9 oz (0.110 kg)
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: -13°F to 14°F
Volume of 25 cu ft
1 section, includes 3 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA89020410	Stainless steel adjustable leg kit includes 4 legs, 4 5/8" H to 7 1/8" H, M6 bolts	11.02 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


Front (Open)

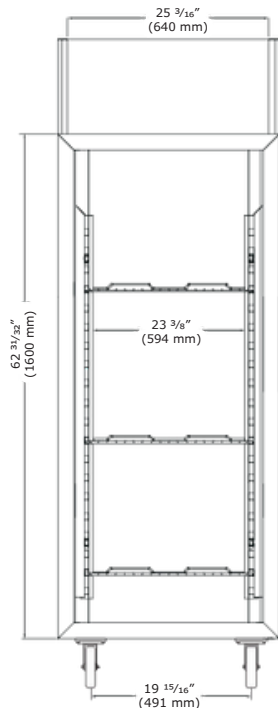


Front (Closed)

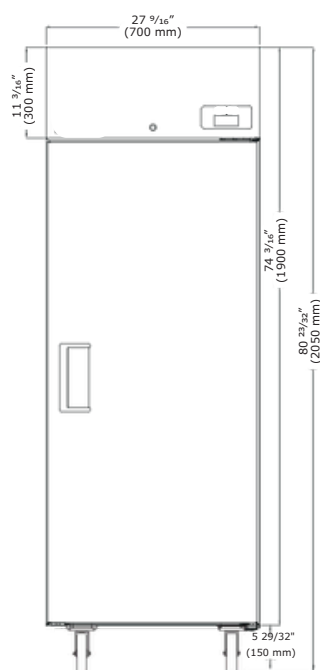

Top

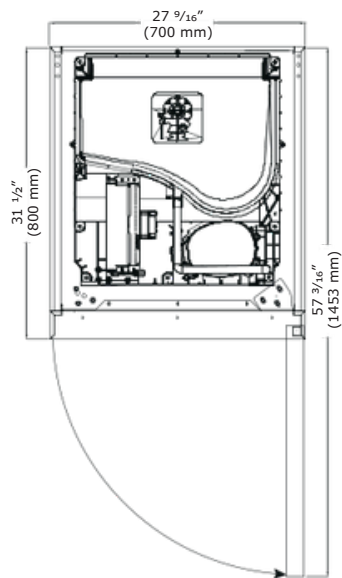

Side

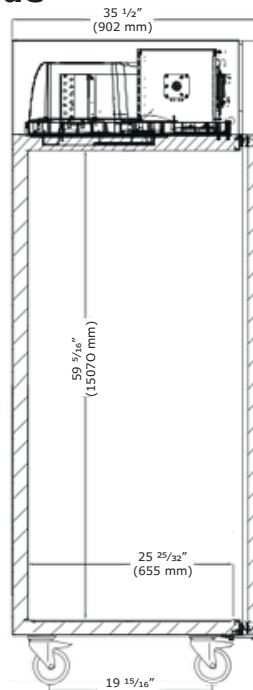

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



25 cu ft Freezers, Reach-In

- Improve the flow and function of your space by having frozen items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- 4 casters included (2 locking) for easy mobility
- LED lighting on glass door models



UCFZ527-SS31A



UCFZ527-SG31A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCFZ527-SS31A	25 cu ft Freezer Solid Door, Reach-In, Field Reversible Hinge	115v / 60hz / 6.2	297 lb
UCFZ527-SG31A	25 cu ft Freezer Glass Door, Reach-In, Field Reversible Hinge	115v / 60hz / 6.2	353 lb

Specifications


UCFZ527-SS31A dimensions: 82 9/32" H x 26 57/64" W x 31 1/2" D
UCFZ527-SG31A dimensions: 82 9/32" H x 26 57/64" W x 31 1/2" D
AISI 304 Stainless steel interior and exterior with lock
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Environmentally friendly R290 refrigerant: 3.9 oz (0.110 kg)
Electronic digital temperature control with alarms
Factory pre-wired for dedicated outlet, 11 ft. cord and plug included NEMA 5-15P
High efficiency evaporator coil & condenser
High efficiency top-mounted compressor
NSF/ANSI Standard 7 compliant
Removable magnetic gasket for easy cleaning
Self-lubricating, sealed cast iron evaporator fan motor with high volume air flow design
Temperature range: -13°F to 14°F
Volume of 25 cu ft
1 section, includes 3 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


Front (Open)

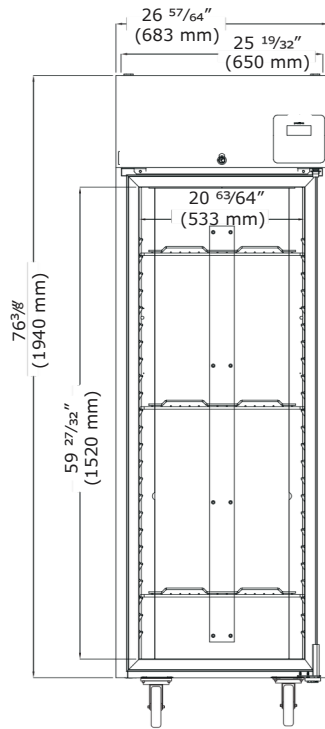


Side

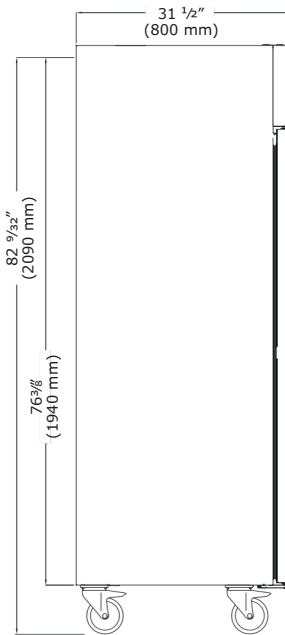


Front (Closed - Glass Door)

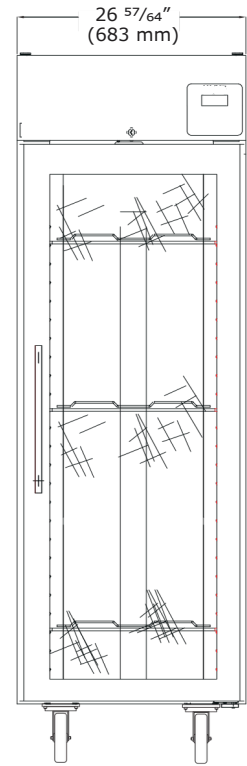

Top

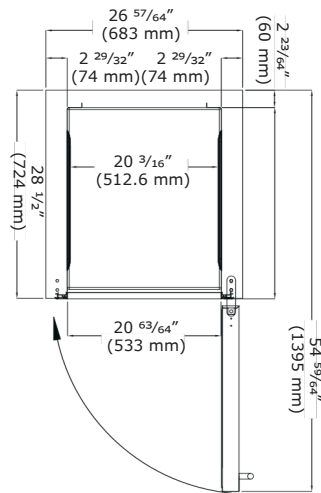

Side

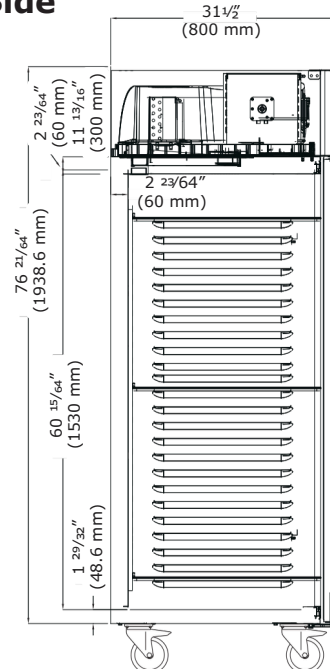

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



49 cu ft Freezer, Reach-In

- Improve the flow and function of your space by having frozen items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- 4 casters included (2 locking) for easy mobility



UCFZ455-SS71A


Model	Description	Voltage/Hz/Phase/Amps.	Shipping Weight
UCFZ455-SS71A	Freezer, Reach-In	115v / 60hz / 1 / 9.6	418 lb

Specifications


UCFZ455-SS71A dimensions: 80 23/32" H x 55 1/8" W x 31 1/2" D
AISI 441 stainless steel interior and exterior with locks
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant: 4.2 oz (0.120kg)
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: -13°F to 14°F
Volume of 49 cu ft
2 sections, includes 6 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA89030400	Stainless steel adjustable leg kit includes 5 legs, 4-5/8" H to 7-1/8" H, M8 bolts	11.02 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


Front (Open)

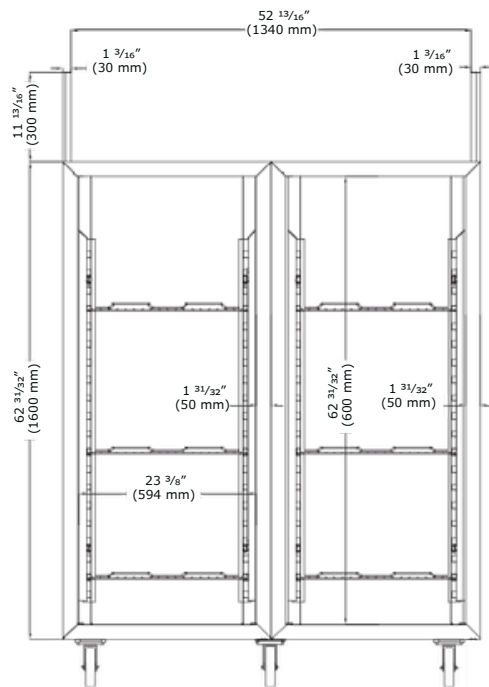


Front (Closed)

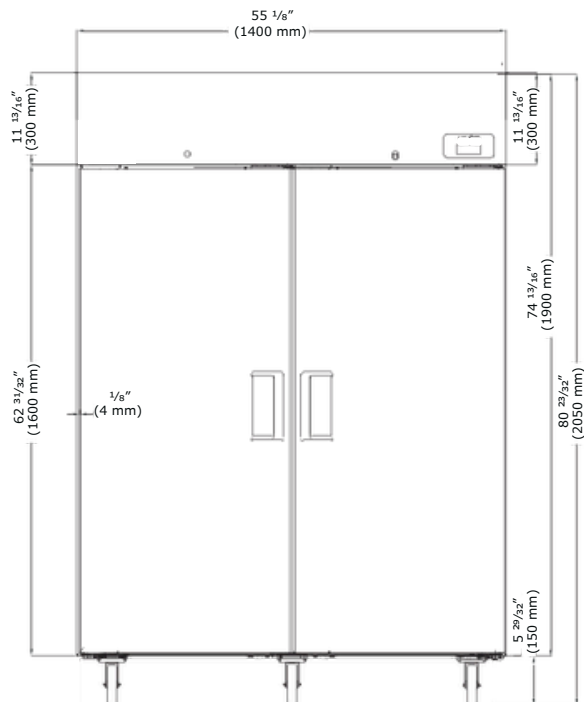

Top

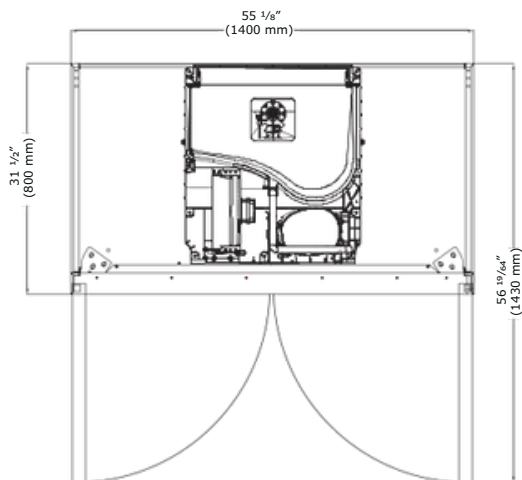

Side

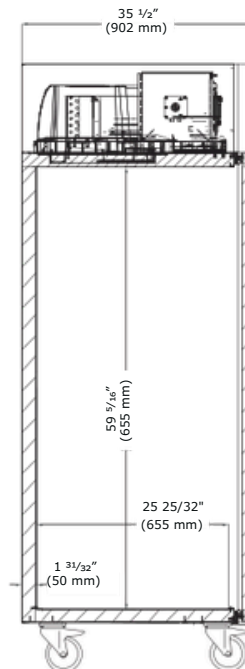

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



49 cu ft Freezers, Reach-In

- Improve the flow and function of your space by having frozen items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- Glass & solid door options
- 6 casters included (2 locking) for easy mobility
- LED lighting on glass door models



UCFZ553-SS71A



UCFZ553-SG71A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCFZ553-SS71A	49 cu ft Freezer Solid Door, Reach-In	115v / 60hz / 9.6	441 lb
UCFZ553-SG71A	49 cu ft Freezer Glass Door, Reach-In	115v / 60hz / 9.6	617 lb

Specifications


UCFZ553-SS71A dimensions: 82 9/32" H x 52 9/16" W x 31 1/2" D
UCFZ553-SG71A dimensions: 82 9/32" H x 52 9/16" W x 31 1/2" D
AISI 304 Stainless steel interior and exterior with locks
Autodefroster
CFC-free high-density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant - 4.2 oz (0.120kg)
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency evaporator coil & condenser
High efficiency top-mounted compressor with 9.6 running amps
LED lighting
NSF/ANSI Standard 7 compliant
Removable magnetic gasket for easy cleaning
Self-lubricating, sealed cast iron evaporator fan motor with high volume air flow design
Temperature range: -13°F to 14°F
Volume of 49 cu ft
2 sections, includes 6 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080534	(1) Stainless steel embossed shelf guide for UCRE553 & UCFZ553 reach-ins, 22"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


**Front
(Closed - Solid Door)**

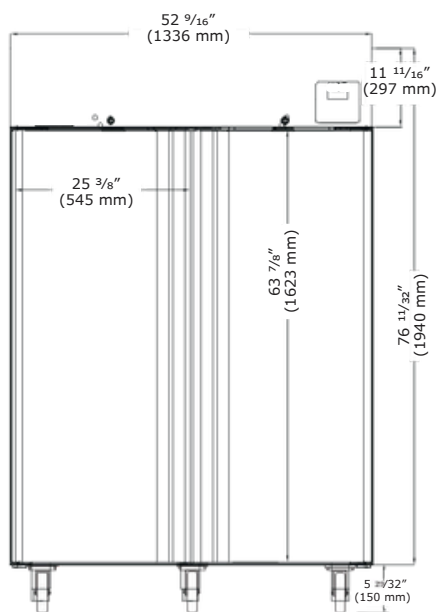


**Front
(Closed - Glass Door)**

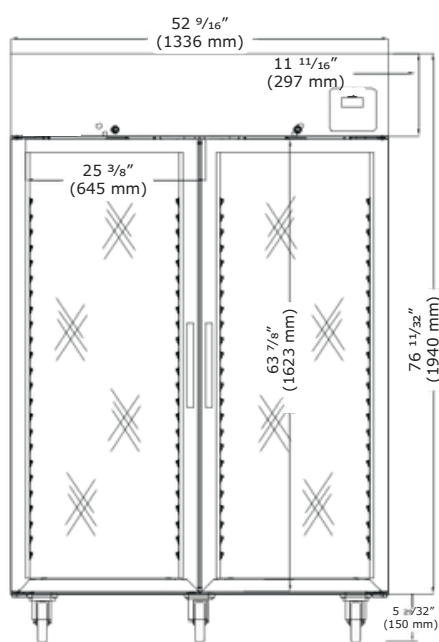


Side

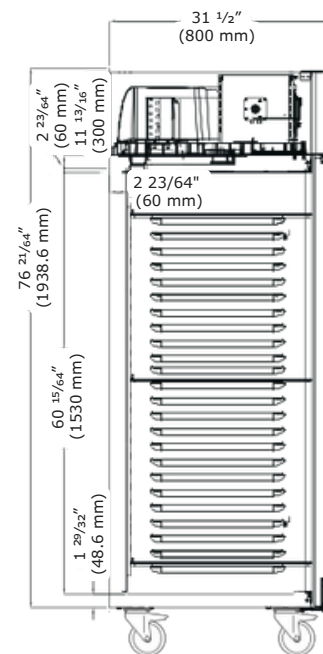


Top

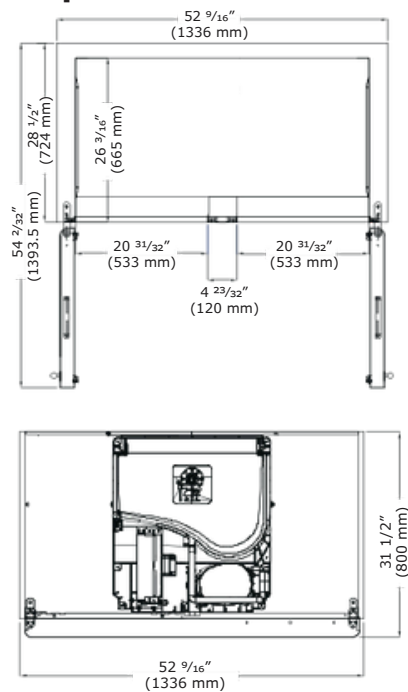

Back

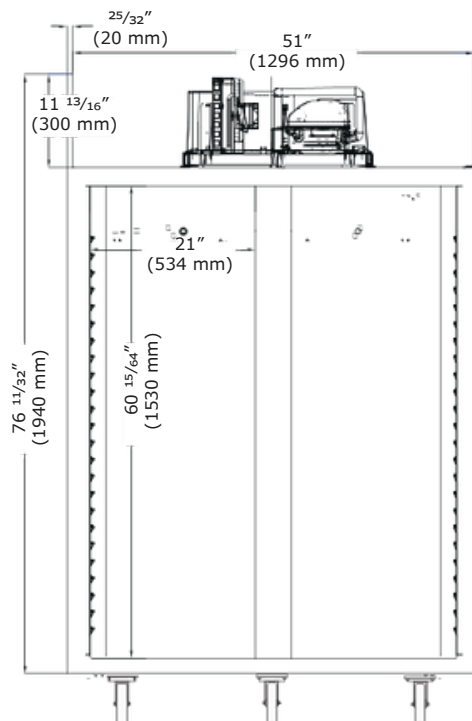

Side

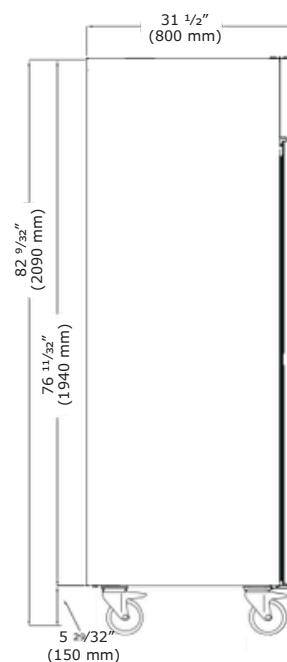

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details



74 cu ft Freezers, Reach-In

- Improve the flow and function of your space by having frozen items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- Glass & solid door options
- 8 casters included (2 locking) for easy mobility
- LED lighting on glass door models



UCFZ585-SS71A



UCFZ585-SG71A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCFZ585-SS71A	Freezer, Reach-In, Solid Door	115v / 60hz / 20	650 lb
UCFZ585-SG71A	Freezer, Reach-In, Glass Door	115v / 60hz / 20	750 lb

Specifications


UCFZ585 dimensions: 83 15/32" H x 85 3/64" W x 31 15/32" D
AISI 304 stainless steel interior and exterior with locks
Autodefroster
CFC-free high-density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Environmentally friendly R290 refrigerant: 2 x 3.5 oz (2 x 0.100kg)
Factory pre-wired for dedicated outlet, 11 ft. cord and plug included NEMA 5-20P
High efficiency compressor
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Removable magnetic gasket for easy cleaning
Self-lubricating, sealed cast iron evaporator fan motor with high volume air flow design
Temperature range: -13°F to 14°F
Volume of 74 cu ft
3 sections, includes 9 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 7/8" x 25 5/8" for reach-ins	7 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


Front (Closed - Solid Door)

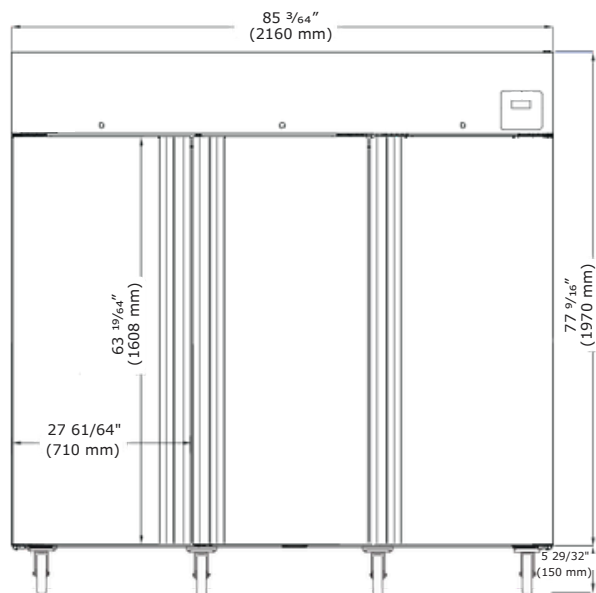


Front (Open)

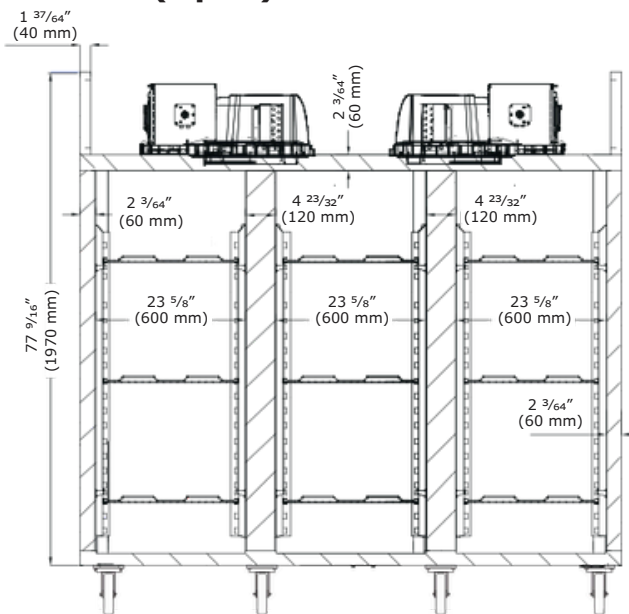


Front (Closed - Glass Door)

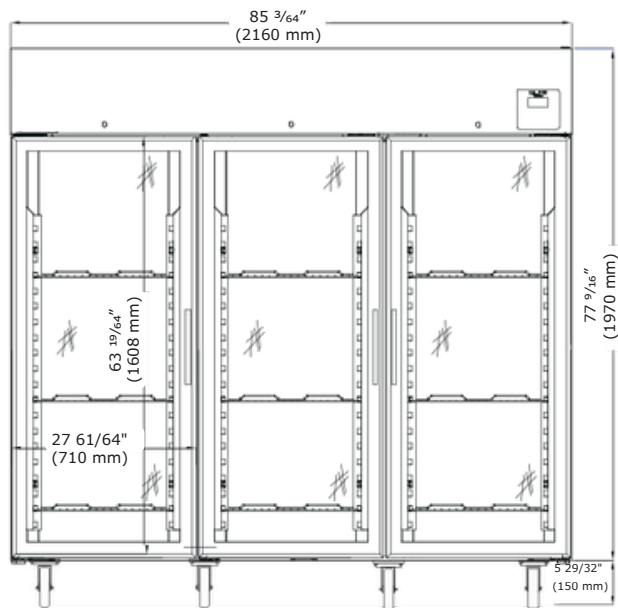

Side

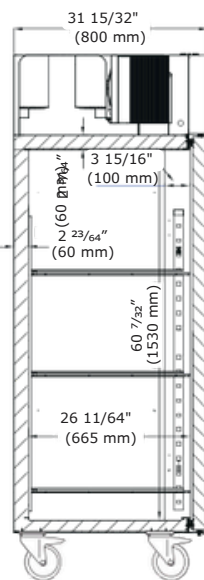

Top

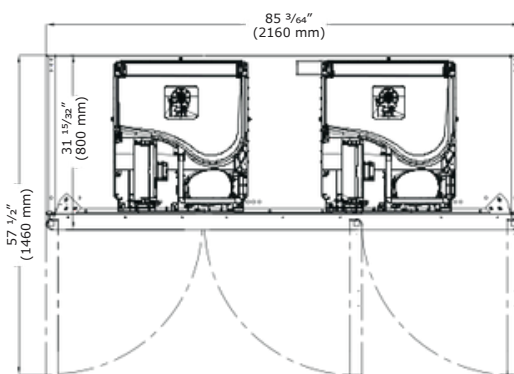

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details





Roll-In Refrigerators & Freezers

REFRIGERATION SOLUTIONS

QualServ commercial roll-in refrigerators and freezers offer unparalleled convenience for today's kitchens. These refrigerators and freezers are designed with large, accessible compartments that can accommodate racks of full-size sheet pans, allowing for easy loading and unloading of food items. Their roll-in design enables chefs and kitchen staff to effortlessly transport pre-prepped ingredients and cooked dishes directly into the refrigerators or freezers, minimizing handling and reducing the risk of contamination.

Engineered with durability and performance in mind, these appliances are perfect for the demanding conditions of bakeries, cafes, restaurants, and beyond. Constructed from high-quality materials, these products maintain precise temperatures, preserving the freshness and quality of stored items. With their combination of practical functionality, durability, and reliability, QualServ roll-in refrigerators and freezers are an asset to any kitchen or foodservice operation, improving efficiency and service.

QUALSERV®

Product Specifications

Roll-In Refrigerators

SOLUTIONS INTERNATIONAL

- Improve the flow and function of your space by having refrigerated items where you need them most
- Solid door models
- Push carts directly into unit
- LED lighting



UCRE633-SS31A



UCRE666-SS71A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE633-SS31A	Roll-thru Refrigerator with Double Solid Door	115v / 60hz / 9.6	441 lb
UCRE666-SS71A	Roll-thru Refrigerator with Quadruple Solid Door	115v / 60hz / 19.2	639 lb

Specifications
UCRE633-SS31A dimensions: 88 1/2" H x 33 7/8" W x 45 1/2" D
UCRE666-SS71A dimensions: 88 1/2" H x 66 7/8" W x 45 1/2" D
UCRE633-SS31A: Environmentally friendly R290 refrigerant - 3.5 oz
UCRE666-SS71A: Environmentally friendly R290 refrigerant - 7.0 oz
UCRE633-SS31A: Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
UCRE666-SS71A: Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-20P
UCRE633-SS31A volume: 35.8 cu ft
UCRE666-SS31A volume: 79 cu ft
AISI 304 stainless steel interior and exterior with lock
Autodefrosts
CFC-free high density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Epoxy coated, sealed evaporator eliminates potential of corrosion
Fixed stainless steel loading ramp
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Temperature range: 28°F to 46°F


Front UCRE633 (Open)




Front UCRE666 (Open)

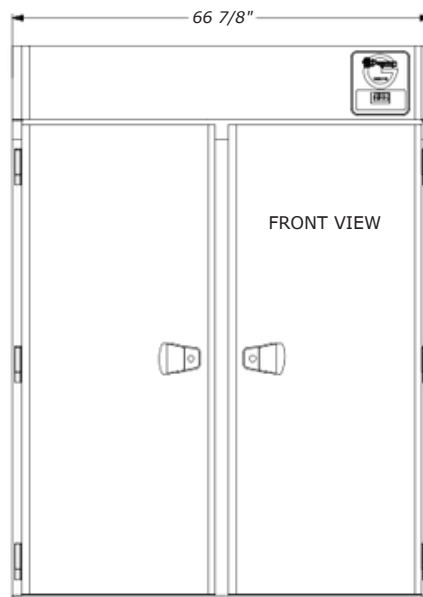


Side UCRE633/666

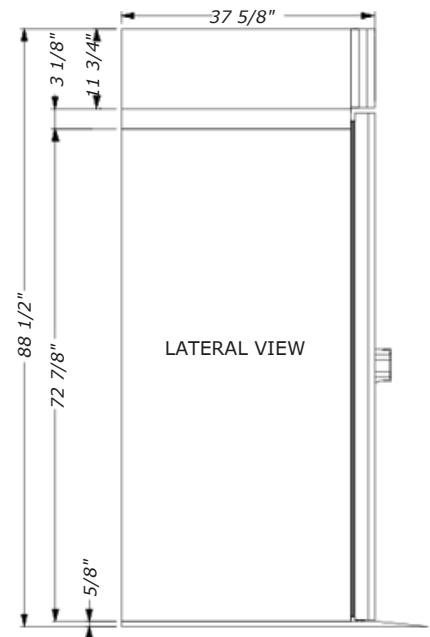




Top UCRE633



Top UCRE666

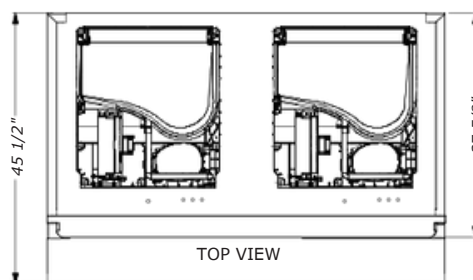

Back UCRE633/666

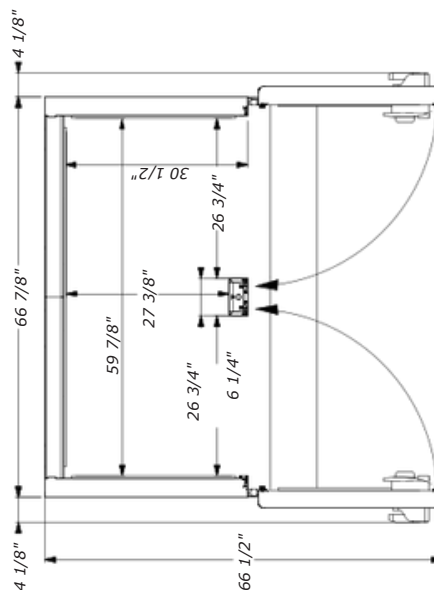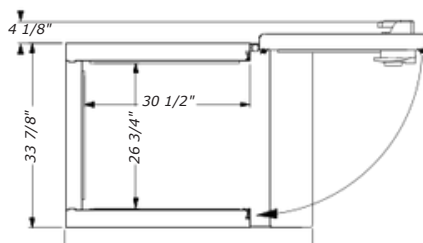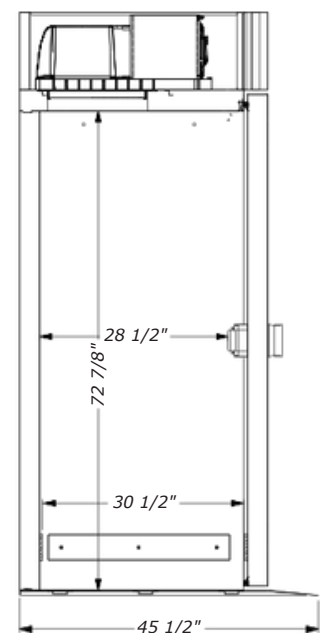

Commercial Warranty

3 Year (parts & labor) / 5 year
sealed system (parts)
See complete warranty for details



Roll-In Freezers

- Improve the flow and function of your space by having frozen items where you need them most
- Solid door models
- Push carts directly into unit
- LED lighting



UCFZ633-SS31A



UCFZ666-SS71A

Model	Description	Voltage/Hz/Amps	Shipping Weight
UCFZ633-SS31A	Roll-in Freezer with Single Solid Door	115v / 60hz / 9.6	452 lb
UCFZ666-SS71A	Roll-in Freezer with Double Solid Door	115v / 60hz / 19.2	639 lb


Specifications

UCFZ633-SS31A dimensions: 89 3/4" H x 33 7/8" W x 46 1/2" D
UCFZ666-SS71A dimensions: 89 3/4" H x 66 7/8" W x 46 1/2" D
UCFZ633-SS31A: Environmentally friendly R290 refrigerant - 4.2 oz
UCFZ666-SS71A: Environmentally friendly R290 refrigerant - 8.2 oz
UCFZ633-SS31A: Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
UCFZ666-SS71A: Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-20P
UCFZ633-SS31A volume: 35.8 cu ft
UCFZ666-SS71A volume: 79 cu ft
AISI 304 stainless steel interior and exterior with lock
Autodefrost
CFC-free high density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Epoxy coated, sealed evaporator eliminates potential of corrosion
Fixed stainless steel loading ramp
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Temperature range: -13°F to 14°F


Front UCFZ633 (Open)




Front UCFZ666 (Open)

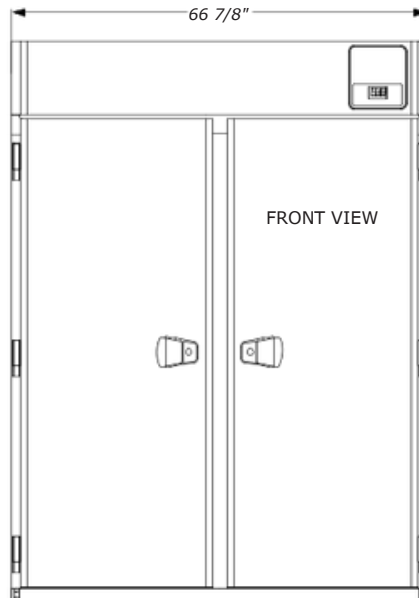


Side UCFZ633/666

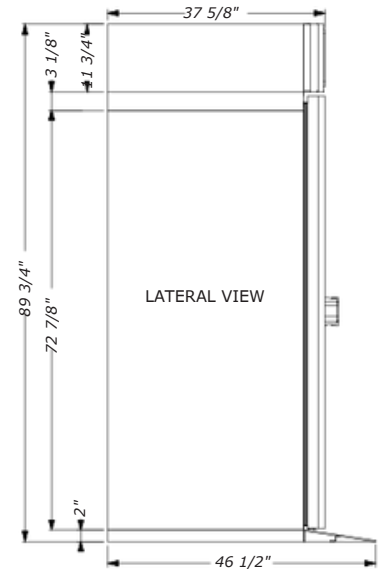




Top UCFZ633

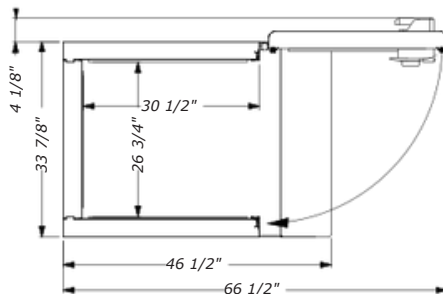

Top UCFZ666

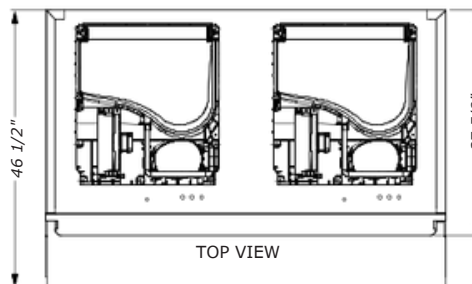

Back UCFZ633/666

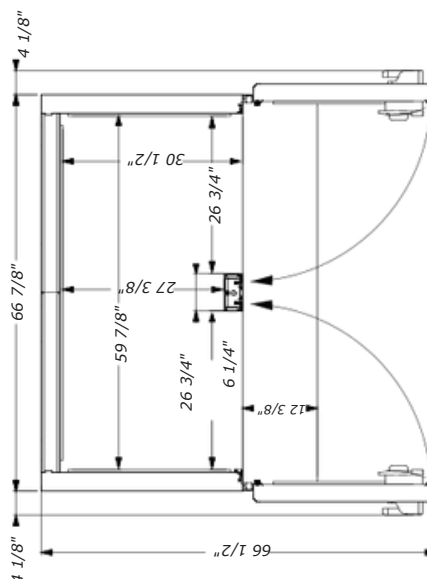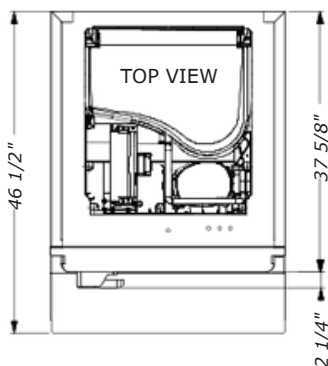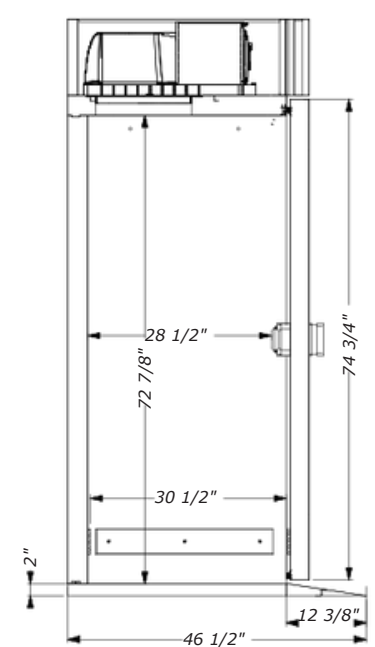

Commercial Warranty

3 Year (parts & labor) / 5 year
sealed system (parts)
See complete warranty for details





Roll-Through Refrigerators

REFRIGERATION SOLUTIONS

QualServ commercial roll-through refrigerators provide cold storage, with kitchen flow in mind. These specialized refrigerators feature dual access points, allowing for seamless loading and unloading of food items from either side. This design facilitates a smooth workflow in busy kitchen environments, as ingredients can be quickly retrieved without disrupting food preparation processes. Our roll-through refrigerators are engineered for durability and performance, making them ideal for the demanding conditions of professional kitchens and cafeterias. Constructed from high-quality materials, these appliances maintain precise temperature control, preserving the freshness and quality of stored food items. Practical functionality, durability, and reliability are all key characteristics of QualServ's roll-through refrigerators and are ideal for any kitchen or cafeteria.

Roll-Thru Refrigerators

- Improve the flow and function of your space by having refrigerated items where you need them most
- Solid door models
- Push carts through the unit
- LED lighting



UCRE733-SS31A




UCRE766-SS71A

Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE733-SS31A	Roll-thru Refrigerator with Single Solid Door	115v / 60hz / 9.6	463 lb
UCRE766-SS71A	Roll-thru Refrigerator with Double Solid Door	115v / 60hz / 19.2	683 lb


Specifications

UCRE733-SS31A dimensions: 88 1/2" H x 33 7/8" W x 53 5/8" D
UCRE766-SS71A dimensions: 88 1/2" H x 66 7/8" W x 53 5/8" D
UCRE733-SS31A: Environmentally friendly R290 refrigerant - 3.5 oz
UCRE766-SS71A: Environmentally friendly R290 refrigerant - 7.0 oz
UCRE733-SS31A: Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
UCRE766-SS71A: Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-20P
UCRE733-SS31A volume: 35.8 cu ft
UCRE766-SS71A Volume: 79 cu ft
AISI 304 stainless steel interior and exterior with lock
Autodefrost
CFC-free high density polyurethane insulated cabinet
Electronic digital temperature control with alarms
Epoxy coated, sealed evaporator eliminates potential of corrosion
Fixed stainless steel loading ramp
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Temperature range: 28°F to 46°F


Front UCRE733 (Open)

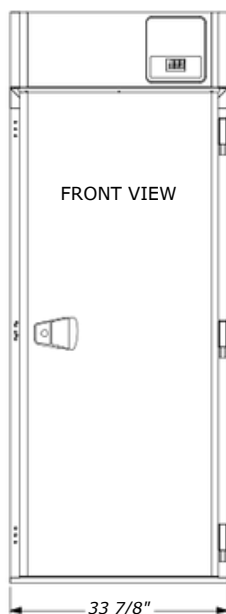


Front UCRE766 (Open)

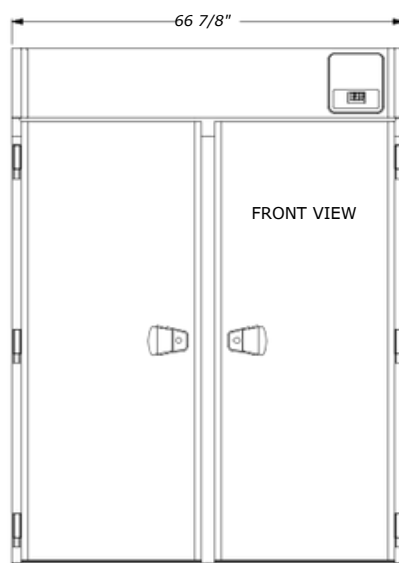


Side UCRE733/766

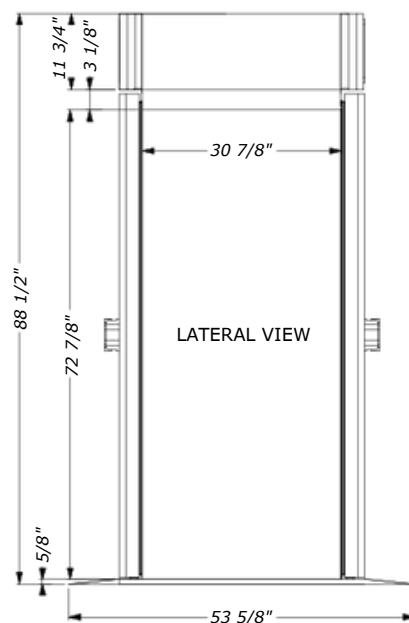




Top UCRE733

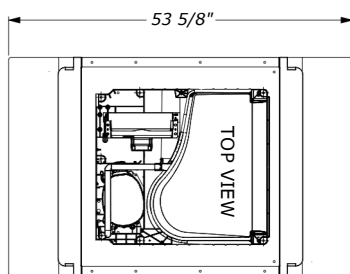

Top UCRE766

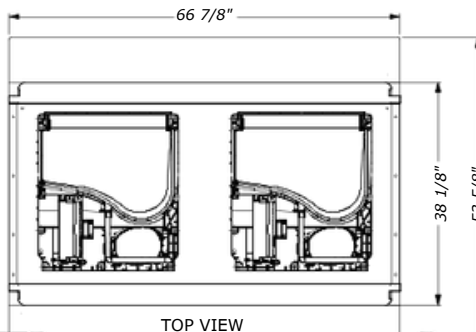

Back UCRE733/766

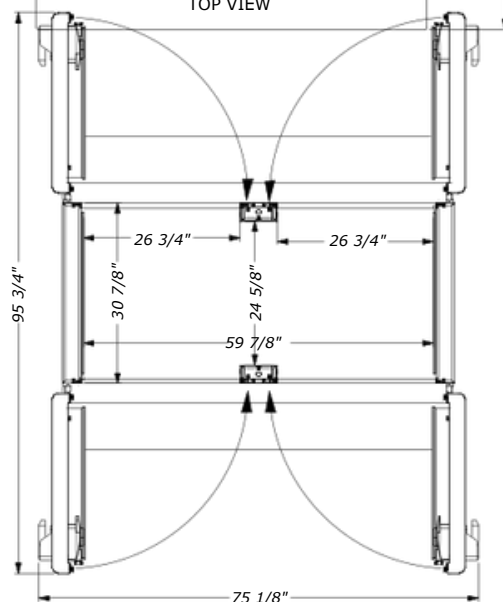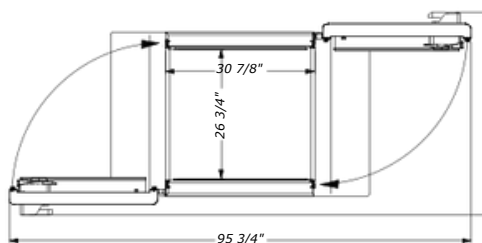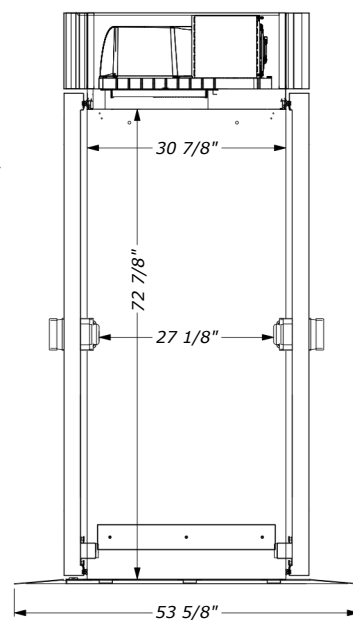

Commercial Warranty

3 Year (parts & labor) / 5 year
sealed system (parts)
See complete warranty for details





Undercounter Front-Venting Refrigerators & Freezers

REFRIGERATION SOLUTIONS

Undercounter refrigerators and freezers are a staple in any kitchen setting. QualServ's front-venting design allows for easy installation under countertops, maximizing interior storage space in a small footprint, without compromising performance. Perfect for kitchens where space is limited, as undercounter appliances offer ideal integration without obstructing workflow or impeding access to other equipment. Our undercounter refrigerators and freezers offer versatile storage solutions, with adjustable shelving and spacious interiors capable of accommodating a variety of ingredients and perishables, from dairy products to fresh produce and beverages. Offered in a variety of sizes, these space-saving refrigerators and freezers compliment any space. Sturdy casters provide easy movement for an easy-to-clean environment and their sturdy construction and stainless steel components are built to withstand daily use. Delivering refrigeration and freezer storage, tailored to your operation.

Front-Venting Refrigerators

- Create a seamless, built-in look that adds a clean, professional appearance, ideal for open kitchens or customer-facing areas.
- Ensure efficient operation in high-traffic areas by directing heat away from the interior, maintaining consistent airflow even in compact spaces.
- Unidirectional casters included for easy maneuverability and stability in tight spaces.



UCRE327-SS11A




UCRE332-SS11A


Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCRE327-SS11A	27" Front-Venting 1 Door Refrigerator	115 / 60 / 1 / 3.4	221 lb
UCRE332-SS11A	32" Front-Venting 1 Door Refrigerator	115 / 60 / 1 / 3.4	242 lb

Specifications
UCRE327-SS11A dimensions: 33 31/32" H x 27 21/32" W x 31 3/4" D
UCRE332-SS11A dimensions: 33 31/32" H X 32 9/32" W X 31 13/16" D
UCRE327-SS11A: volume of 6.39 cu ft, 1 epoxy coated shelf
UCRE332-SS11A: volume of 8 cu ft, 1 epoxy coated shelf
AISI 304 stainless steel interior and exterior
Autodefrost
CFC-free high density polyurethane insulated cabinet
Electronic Control
Environmentally friendly R290 refrigerant
Epoxy coated, sealed evaporator eliminates potential corrosion
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
NSF/ANSI Standard 7 compliant
Temperature range: 28°F to 46°F


Front (UCRE327-SS11A)

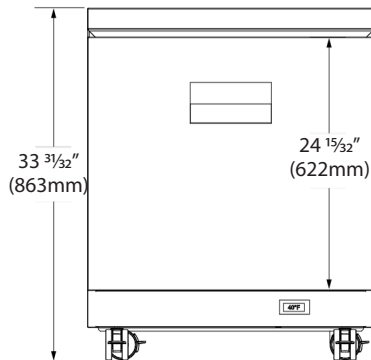


Top

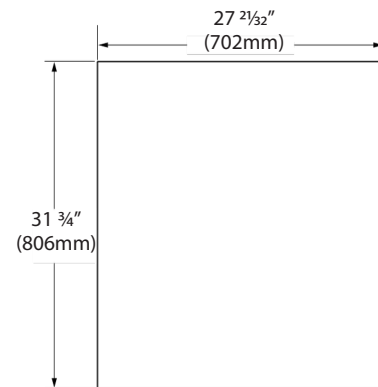


Front (UCRE332-SS11A)

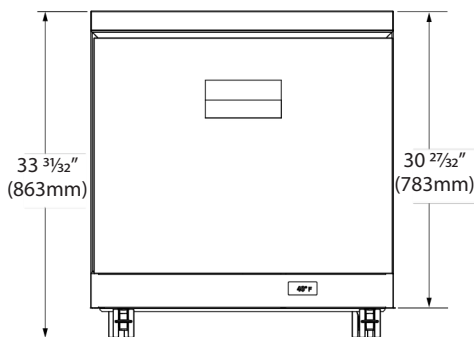

Top

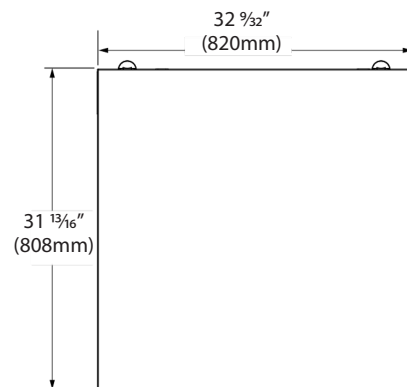

Side (all models)

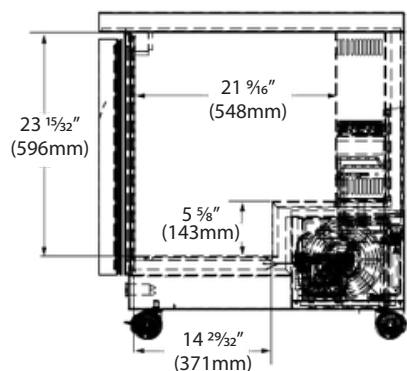

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

Front-Venting Refrigerators

- Create a seamless, built-in look that adds a clean, professional appearance, ideal for open kitchens or customer-facing areas.
- Ensure efficient operation in high-traffic areas by directing heat away from the interior, maintaining consistent airflow even in compact spaces.
- Unidirectional casters included for easy maneuverability and stability in tight spaces.



UCRE336-SS61A



UCRE348-SS61A



UCRE360-SS61A



UCRE372-SS61A

Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCRE336-SS61A	2 Door Front-Venting Refrigerator	115 / 60 / 1 / 3.4	264 lb
UCRE348-SS61A	2 Door Front-Venting Refrigerator	115 / 60 / 1 / 3.4	286 lb
UCRE360-SS61A	2 Door Front-Venting Refrigerator	115 / 60 / 1 / 3.4	342 lb
UCRE372-SS61A	3 Door Front-Venting Refrigerator	115 / 60 / 1 / 6.8	430 lb

Specifications

UCRE336-SS61A dimensions: 33 31/32" H x 36 5/22" W x 31 13/16" D

UCRE348-SS61A dimensions: 33 31/32" H X 48" W X 31 3/4" D

UCRE360-SS61A dimensions: 33 31/32" H X 60 13/32" W X 31 3/4" D

UCRE372-SS61A dimensions: 33 31/32" H X 71 29/32" W X 31 3/4" D

UCRE336-SS61A: volume of 9.29 cu ft, 2 epoxy coated shelves

UCRE348-SS61A: volume of 13.17 cu ft, 2 epoxy coated shelves

UCRE360-SS61A: volume of 17.04 cu ft, 2 epoxy coated shelves

UCRE372-SS61A: volume of 19.86 cu ft, 3 epoxy coated shelves

AISI 304 stainless steel interior and exterior

Autodefrozt

CFC-free high density polyurethane insulated cabinet

Electronic Control

Environmentally friendly R290 refrigerant


Epoxy coated, sealed evaporator eliminates potential corrosion

Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P


NSF/ANSI Standard 7 compliant

Temperature range: 28°F to 46°F


Top (UCRE336)

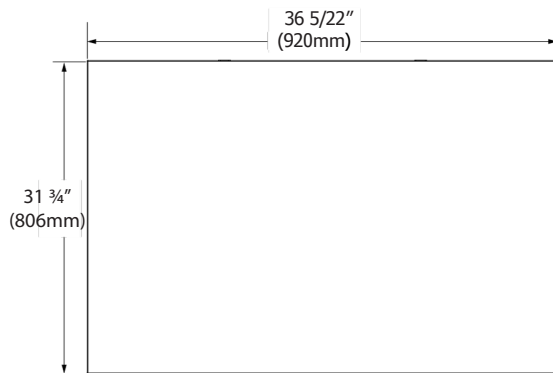


Top (UCRE348)

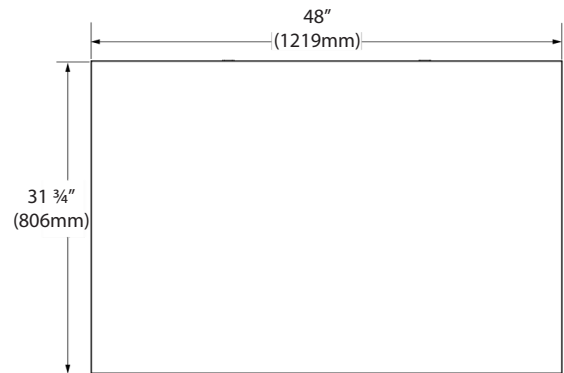


Top (UCRE372)

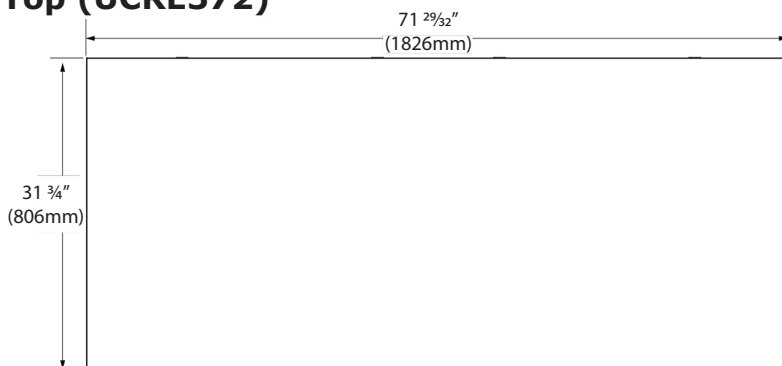


Top (UCRE360)

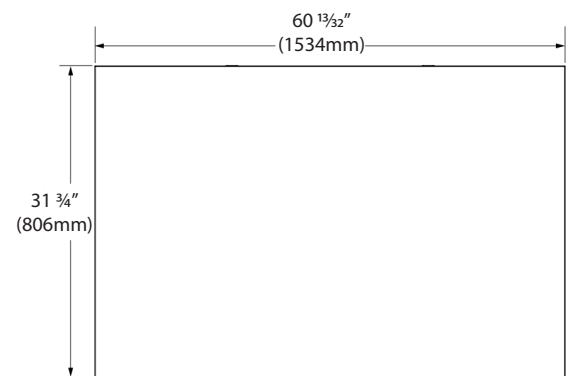


Front (UCRE336, 348, 360)

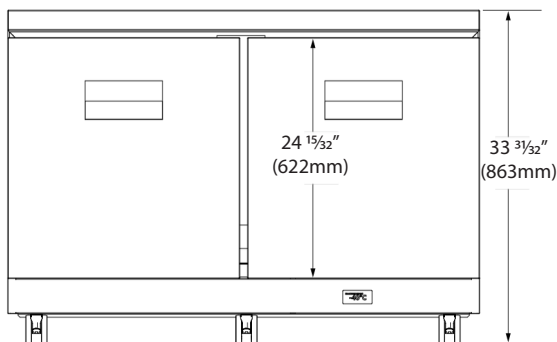

Side (all models)

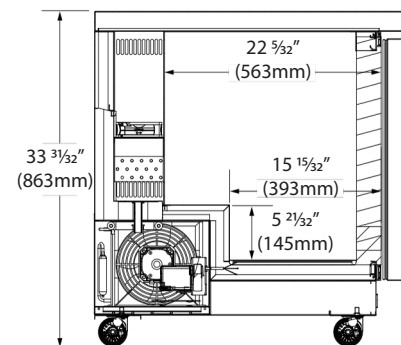

Front (UCRE372)

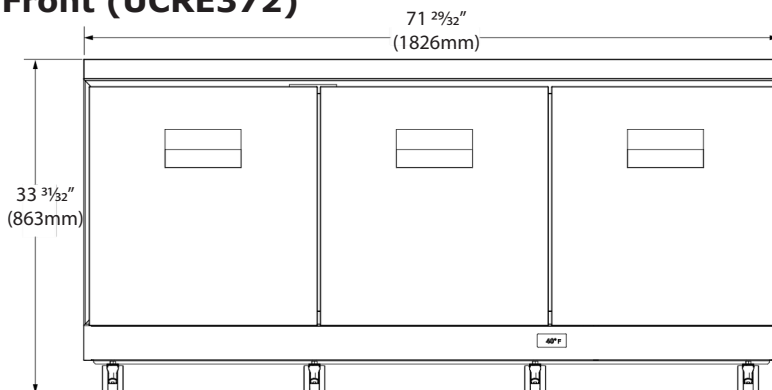

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

Front-Venting Freezers

- Create a seamless, built-in look that adds a clean, professional appearance, ideal for open kitchens or customer-facing areas.
- Ensure efficient operation in high-traffic areas by directing heat away from the interior, maintaining consistent airflow even in compact spaces.
- Unidirectional casters included for easy maneuverability and stability in tight spaces.



UCFZ327-SS11A




UCFZ332-SS11A


Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCFZ327-SS11A	27" Front-Venting 1 Door Freezer	115 / 60 / 1 / 6	231 lb
UCFZ332-SS11A	32" Front-Venting 1 Door Freezer	115 / 60 / 1 / 6	253 lb

Specifications
UCFZ327-SS11A dimensions: 33 31/32" H x 27 21/32" W x 31 3/4" D
UCFZ332-SS11A dimensions: 33 31/32" H X 32 9/32" W X 31 13/16" D
UCFZ327-SS11A: volume of 6.39 cu ft, 1 epoxy coated shelf
UCFZ332-SS11A: volume of 8 cu ft, 1 epoxy coated shelf
AISI 304 stainless steel interior and exterior
Autodefroster
CFC-free high density polyurethane insulated cabinet
Electronic Control
Environmentally friendly R290 refrigerant
Epoxy coated, sealed evaporator eliminates potential corrosion
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
NSF/ANSI Standard 7 compliant
Temperature range: -13°F to 14°F


Front (UCFZ327-SS11A)

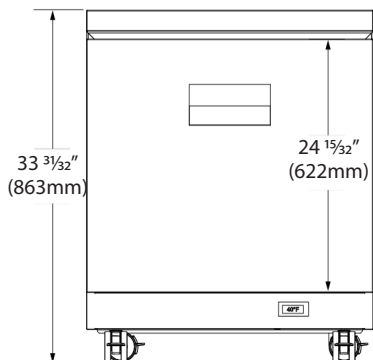


Top

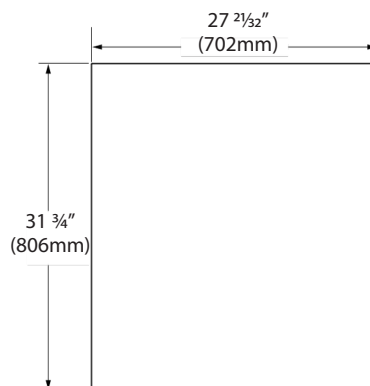


Front (UCFZ332-SS11A)

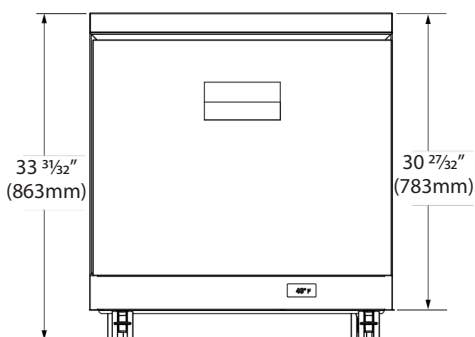

Top

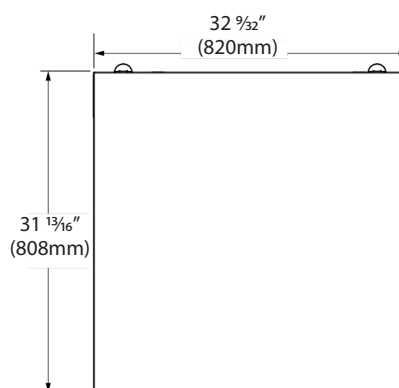

Side (all models)

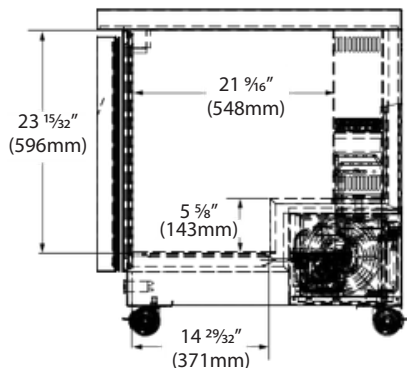

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

Front-Venting Freezers

- Create a seamless, built-in look that adds a clean, professional appearance, ideal for open kitchens or customer-facing areas.
- Ensure efficient operation in high-traffic areas by directing heat away from the interior, maintaining consistent airflow even in compact spaces.
- Unidirectional casters included for easy maneuverability and stability in tight spaces.



UCFZ336-SS61A



UCFZ348-SS61A



UCFZ360-SS61A




UCFZ372-SS61A


Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCFZ336-SS61A	2 Door Front-Venting Freezer	115 / 60 / 1 / 6	264 lb
UCFZ348-SS61A	2 Door Front-Venting Freezer	115 / 60 / 1 / 6	319 lb
UCFZ360-SS61A	2 Door Front-Venting Freezer	115 / 60 / 1 / 6	342 lb
UCFZ372-SS61A	3 Door Front-Venting Freezer	115 / 60 / 1 / 12	452 lb

Specifications
UCFZ336-SS61A dimensions: 33 31/32" H x 36 5/22" W x 31 13/16" D
UCFZ348-SS61A dimensions: 33 31/32" H X 48" W X 31 3/4" D
UCFZ360-SS61A dimensions: 33 31/32" H X 60 13/32" W X 31 3/4" D
UCFZ372-SS61A dimensions: 33 31/32" H X 71 29/32" W X 31 3/4" D
UCFZ336-SS61A: volume of 9.29 cu ft, 2 epoxy coated shelves
UCFZ348-SS61A: volume of 13.17 cu ft, 2 epoxy coated shelves
UCFZ360-SS61A: volume of 17.04 cu ft, 2 epoxy coated shelves
UCFZ372-SS61A: volume of 19.86 cu ft, 3 epoxy coated shelves
AISI 304 stainless steel interior and exterior
Autodefroster
CFC-free high density polyurethane insulated cabinet
Electronic Control
Environmentally friendly R290 refrigerant
Epoxy coated, sealed evaporator eliminates potential corrosion
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
NSF/ANSI Standard 7 compliant
Temperature range: -13°F to 14°F


Top (UCFZ336)

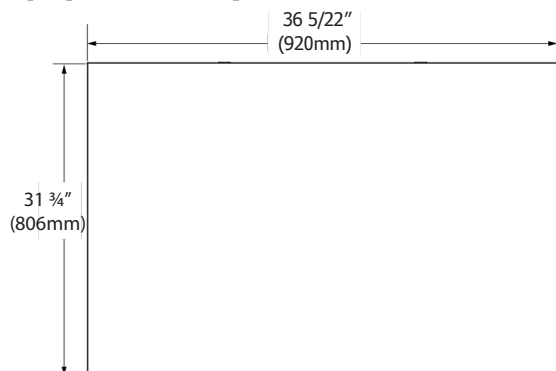


Top (UCFZ348)

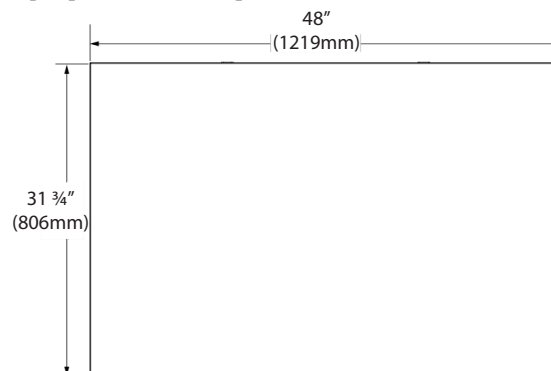


Top (UCFZ372)

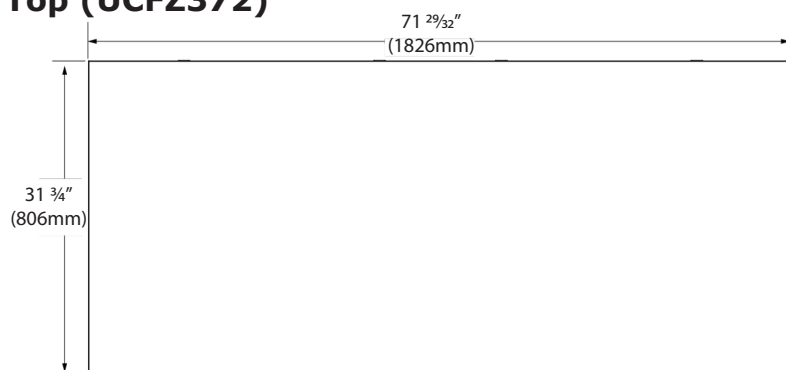


Top (UCFZ360)

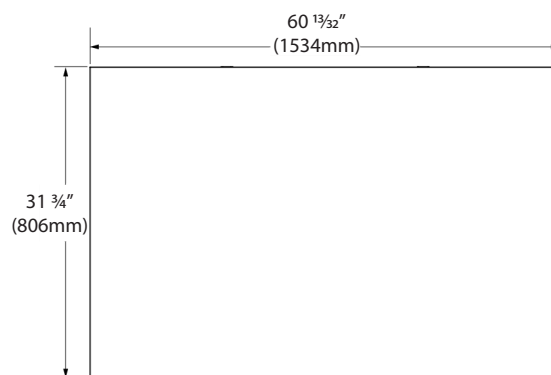


Front (UCFZ336, 348, 360)

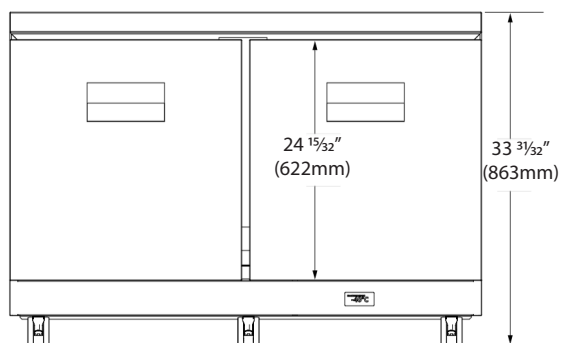

Side (all models)

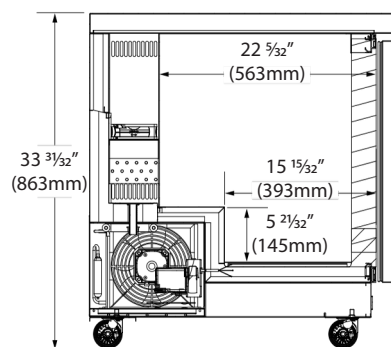

Front (UCFZ372)

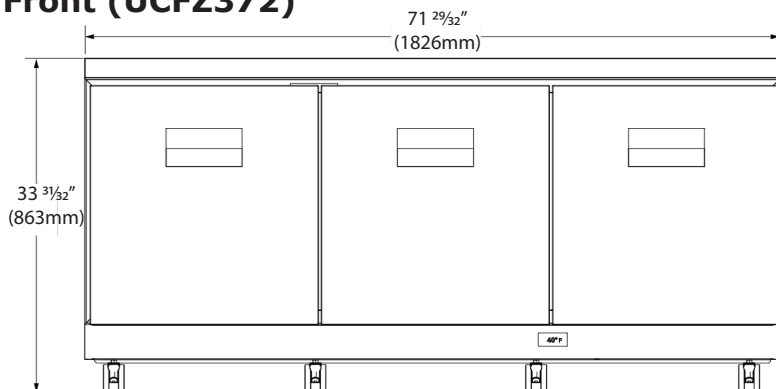

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

QS



QUALSERV[®]
SOLUTIONS INTERNATIONAL

sales.refrigeration@qualservintl.com
800.643.2980